

Docket No. P5482a

First Class Mail

Please acknowledge receipt of the accompanying papers identified below by placing your Office Date Stamp where appropriate hereon and mail.

Date: 8/2/05

Atty: RH Epson Research and Development, Inc.


Type of Paper: Request For Certificate of Correction of Patent For PTO Mistake
with Exhibits A & B

Patentee: Shinji Nakamiya, et al.

Patent No.: 6,898,156

Issue Date: May 24, 2005

Fee: \$0 By Deposit Account No. 19-2746

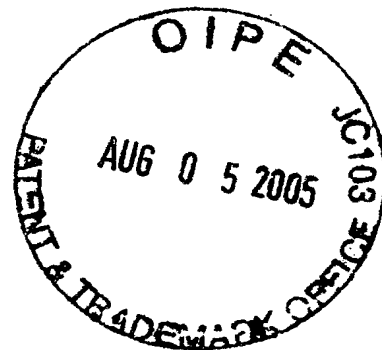

Docket No. P5482a

First Class Mail

Please acknowledge receipt of the accompanying papers identified below by placing your Office Date Stamp where appropriate hereon and mail.

Date: 8/2/05

Atty: RH Epson Research and Development, Inc.

Type of Paper: Request For Certificate of Correction of Patent For PTO Mistake
with Exhibits A & B

Patentee: Shinji Nakamiya, et al.

Patent No.: 6,898,156

Issue Date: May 24, 2005

Fee: \$0 By Deposit Account No. 19-2746

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Patent Number: 6,898,156
Issued: May 24, 2005
Name of Patentee: Shinji Nakamiya, et al.
Serial No.: 09/717,426
Filing Date: November 20, 2000
Title of Invention: Electronic Timepiece with Checking Function, and Checking Method Therefor (As Amended)

CERTIFICATE OF MAILING

I hereby certify that this correspondence, and the documents attached hereto, are being deposited with the United States Postal Service as "First Class" mail with sufficient postage in an envelope addressed to Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on this date.

Date: August 2, 2005


Mary Bastida

**REQUEST FOR CERTIFICATE OF CORRECTION OF PATENT
FOR PTO MISTAKE (37 CFR §1.322(a))**

Attention Certificate of Corrections Branch
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

The subject patent includes a large number of errors, due to a mistake by the Patent and Trademark Office.

The extent of the errors is so great that a Form PTO-1050 is not an appropriate manner of correction. Reprinting of the patent is suggested.

The nature of the errors is as follows. The Notice of Allowability (Exhibit A) is responsive to the Preliminary Amendment filed October 12, 2004 (paragraph 1) and the allowed claims are 1-32 (paragraph 2).

However, the issued patent does not reflect the Preliminary Amendment filed October 12, 2004 and was issued with only 24 claims. For the Office's convenience, a copy of the Preliminary Amendment filed October 12, 2004 is enclosed as Exhibit B.

REQUEST FOR CERTIFICATE OF CORRECTION OF
PATENT FOR PTO MISTAKE (37 CFR §1.322(a))

Patentee's undersigned attorney may be reached at the telephone number listed below. All correspondence should continue to be directed to our below listed address.

Respectfully submitted,



Rosalio Haro
Registration No. 42,633

Please address all correspondence to:
Epson Research and Development, Inc.
150 River Oaks Parkway, Suite 225
San Jose, CA 95134
Customer No. 20178
Phone: (408) 952-6000
Facsimile: (408) 954-9058

Date: August 2, 2005

Notice of Allowability

Application No.

09/717,426

Examiner

Jeanne-Marguerite Goodwin

Applicant(s)

NAKAMIYA ET AL.

Art Unit

2841

-- The MAILING DATE of this communication appears on the cover sheet with the correspondence address--

All claims being allowable, PROSECUTION ON THE MERITS IS (OR REMAINS) CLOSED in this application. If not included herewith (or previously mailed), a Notice of Allowance (PTOL-85) or other appropriate communication will be mailed in due course. **THIS NOTICE OF ALLOWABILITY IS NOT A GRANT OF PATENT RIGHTS.** This application is subject to withdrawal from issue at the initiative of the Office or upon petition by the applicant. See 37 CFR 1.313 and MPEP 1308.

1. ☒ This communication is responsive to Preliminary Amendment filed 10/12/04.
2. ☒ The allowed claim(s) is/are 1-32.
3. ☒ The drawings filed on 12 October 2004 are accepted by the Examiner.
4. ☒ Acknowledgment is made of a claim for foreign priority under 35 U.S.C. § 119(a)-(d) or (f).
 - a) ☒ All b) ☐ Some* c) ☐ None of the:
 1. ☒ Certified copies of the priority documents have been received.
 2. ☐ Certified copies of the priority documents have been received in Application No. _____.
 3. ☐ Copies of the certified copies of the priority documents have been received in this national stage application from the International Bureau (PCT Rule 17.2(a)).

* Certified copies not received: _____.

Applicant has THREE MONTHS FROM THE "MAILING DATE" of this communication to file a reply complying with the requirements noted below. Failure to timely comply will result in ABANDONMENT of this application.

THIS THREE-MONTH PERIOD IS NOT EXTENDABLE.

5. ☐ A SUBSTITUTE OATH OR DECLARATION must be submitted. Note the attached EXAMINER'S AMENDMENT or NOTICE OF INFORMAL PATENT APPLICATION (PTO-152) which gives reason(s) why the oath or declaration is deficient.
 6. ☐ CORRECTED DRAWINGS (as "replacement sheets") must be submitted.
 - (a) ☐ including changes required by the Notice of Draftperson's Patent Drawing Review (PTO-948) attached
 - 1) ☐ hereto or 2) ☐ to Paper No./Mail Date _____.
 - (b) ☐ including changes required by the attached Examiner's Amendment / Comment or in the Office action of Paper No./Mail Date _____.
- Identifying indicia such as the application number (see 37 CFR 1.84(c)) should be written on the drawings in the front (not the back) of each sheet. Replacement sheet(s) should be labeled as such in the header according to 37 CFR 1.121(d).
7. ☐ DEPOSIT OF and/or INFORMATION about the deposit of BIOLOGICAL MATERIAL must be submitted. Note the attached Examiner's comment regarding REQUIREMENT FOR THE DEPOSIT OF BIOLOGICAL MATERIAL.

Attachment(s)

1. ☒ Notice of References Cited (PTO-892)
2. ☐ Notice of Draftperson's Patent Drawing Review (PTO-948)
3. ☒ Information Disclosure Statements (PTO-1449 or PTO/SB/08),
Paper No./Mail Date 7/26/04, 5/6/03, 2/12/01.
4. ☐ Examiner's Comment Regarding Requirement for Deposit
of Biological Material
5. ☐ Notice of Informal Patent Application (PTO-152)
6. ☐ Interview Summary (PTO-413),
Paper No./Mail Date _____.
7. ☐ Examiner's Amendment/Comment
8. ☒ Examiner's Statement of Reasons for Allowance
9. ☐ Other _____.

EXHIBIT

tabbies

A

Docket No. P5482a

First Class Mail

Please acknowledge receipt of the accompanying papers identified below by placing your Office Date Stamp where appropriate hereon and mail.

Date: 10/5/04 Atty: RH Epson Research and Development, Inc.


Type of Paper: Amendment Transmittal (In Duplicate); Third Preliminary Amendment; Formal Drawing Fig. 4 Replacement Sheet; Version of Substitute Specification With Markings to Show Changes and Substitute Specification (Clean Version).

Applicant(s): Shinji Nakamiya, et al.

Serial No.: 09/717,426

Filing Date: November 20, 2000

Fee: \$232.00 By Deposit Account No. 19-2746



EXHIBIT

B

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant(s): Shinji Nakamiya, et al.

Group Art Unit: 2841

Serial No.: 09/717,426

Examiner: Jeanne M. Goodwin

Filed: November 20, 2000

Title: Electronic Timepiece with Checking Function and Its Checking Method

CERTIFICATE OF MAILING

I hereby certify that this transmittal and documents referred to as being enclosed are being deposited with the United States Postal Service as "First Class" mail with sufficient postage in an envelope addressed to Mail Stop Amendment, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on this date.

Date: October 5, 2004


 Mary Bastida

**AMENDMENT TRANSMITTAL LETTER AND
 PETITION FOR EXTENSION OF TIME UNDER 37 CFR 1.136(a) (IF REQUIRED)**

MAIL STOP AMENDMENT
 COMMISSIONER FOR PATENTS
 P.O. BOX 1450
 ALEXANDRIA, VA 22313-1450

Transmitted herewith is an amendment in the above-identified application. The fee is calculated as shown below:

Claims Remaining After Amendment	Highest # Previously Paid For	# Extra	Rate	Additional Fee
Total Claims: 32	24	8	\$18.00	\$ 144.00
Independent Claims: 14	13	1	\$88.00	\$ 88.00
<input type="checkbox"/> 1st Presentation of Multiple Dependent Claims			\$300.00	\$
TOTAL ADDITIONAL FEE FOR THIS AMENDMENT				\$ 232.00

☒ No additional fee is required.

☐ Applicant(s) petition for an extension of time under 37 CFR 1.136 (fees: 37 CFR 1.17(a)-(d) for the total number of months checked below.

Extension (Months)	Fee For Large Entity
<input type="checkbox"/> One (1) Month	\$110.00
<input type="checkbox"/> Two (2) Months	\$430.00
<input type="checkbox"/> Three (3) Months	\$980.00
<input type="checkbox"/> Four (4) Months	\$1530.00
FEE:	\$

☒ If an extension of time is required, please consider this a petition therefor together with authorization to charge Deposit Account No. 19-2746 for any extension fee.


☐ Relative to response to the Final Office Action, an extension for _____ months has already been secured and the fee paid therefor of \$_____ is deducted from the total fee due for the total months of extension now requested.

☒ Applicant believes that no extension of time is required. However, this conditional petition is being made to provide for the possibility that applicant has inadvertently overlooked the need for a petition for extension of time.

- ☐ Enclosed is an Information Disclosure Statement together with Form PTO-1449 and a copy of _____ cited reference(s):
- ☐ Enclosed is a certification under 37 CFR 1.97(e).
- ☐ The Commissioner is hereby authorized to charge the fee of \$180.00 under 37 CFR 1.17(p) to Deposit Account No. 19-2746.
- ☒ Enclosed is a replacement sheet for Fig(s). 4.
- ☒ Enclosed are Substitute Specification (Clean Version); and Substitute Specification With Markings to Show Changes.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees during the pendency of this application or credit any overpayment to our Deposit Account No. 19-2746.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.16.
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to our Deposit Account No. 19-2746.
- ☒ Any additional filing fees required under 37 CFR 1.16.
- ☒ Any patent application processing fees under 37 CFR 1.16.
- ☐ Enclosed is a Submission Under 37 CFR §1.129(a).
- ☐ Enclosed is a Terminal Disclaimer And Certificate Under 37 CFR §3.73(b). The Commissioner is hereby authorized to charge the fee of \$110.00 under 37 CFR 1.20(d) to Deposit Account No. 19-2746. A duplicate copy of this transmittal letter is enclosed.
- ☒ Please charge Deposit Account No. 19-2746 the sum of \$ 232.00. A duplicate copy of this transmittal letter is enclosed.

Date: October 5, 2004

Respectfully submitted,



Rosalio Haro
Registration No. 42,633

Please address all correspondence to:
Epson Research and Development, Inc.
Intellectual Property Department
150 River Oaks Parkway, Suite 225
San Jose, CA 95134
Telephone No.: (408) 952-6000
Facsimile: (408) 954-9058
Customer No. 20178

P5482a

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants: Shinji Nakamiya, et al.

Group Art Unit: 2841

Serial No.: 09/717,426

Examiner: Jeanne M. Goodwin


Filed: November 20, 2000

Title: Electronic Timepiece with Checking Function and Its Checking Method

CERTIFICATE OF MAILING

I hereby certify that this Preliminary Amendment is being deposited with the United States Postal Service with sufficient postage as "First Class" mail in an envelope addressed to Mail Stop Amendment, Commissioner for Patents, P.O. Box 1450, Alexandria, VA 22313-1450 on this date.

Date: October 5, 2004


Mary Bastida

THIRD PRELIMINARY AMENDMENT

Mail Stop Amendment
Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Preliminary to examination please amend the above-identified application as follows:

AMENDMENTS TO TITLE:

Please remove the following current title:

Electronic Timepiece With Checking Function And Its Checking Method

and replace it with the following amended title:

**Electronic Timepiece With Checking Function, And Checking Method
Therefor**

AMENDMENTS TO DRAWINGS:

Please replace Fig. 4 with the presently included replacement sheet Fig. 4. The amendment to Fig. 4 consists of converting the RESET input of counter 402 from an active low input to an active high input in order to maintain consistency paragraph 90 of the specification.

AMENDMENTS TO SPECIFICATION:

Please substitute the accompanying Substitute Specification for the original Specification. In accordance with 37 C.F.R. 1.125, the Substitute Specification has been submitted in clean form as a separate document and the specification paragraphs have been numbered as per 37 C.F.R. 1.52(b)(6). A marked-up version of the Substitute Specification follow the "Remarks" section of this amendment.

The present substitute specification includes no new matter.

AMENDMENTS TO CLAIMS:

The listing of claims will replace all prior versions, and listings, of claims in the application:

LISTING OF CLAIMS:

1. (Currently Amended) An electronic timepiece comprising:
 - an external input unit for receiving an external input signal;
 - a displaying section for displaying time;
 - a battery;
 - a drive unit for driving the displaying section ~~using with~~ by use of electrical power stored in the battery;
 - a comparator unit for comparing a voltage corresponding to a voltage stored in the battery with a reference voltage,
 - a discharge control unit for starting discharge of the battery when ~~an external input signal ordering start of discharge start is input with the said~~ external input unit receives a predetermined external input signal, and for stopping the discharge of the battery when a comparison result determined by the comparator unit satisfies a ~~discharge stop predetermined~~ condition.
2. (Currently Amended) An electronic timepiece according to claim 1,
 - wherein the discharge control unit resumes discharge ~~from of~~ the battery when ~~the a~~ a comparison result determined by the comparator unit becomes ~~unsatisfying to~~ does not satisfy the ~~discharge stop predetermined~~ condition.
3. (Currently Amended) An electronic timepiece according to claim 2,
 - wherein the discharge control unit, when ~~a predetermined external signal is received by the external input unit~~ receives the predetermined external input signal, starts discharge ~~from of~~ the battery ~~in using~~ a first discharge method~~procedure~~; and
 - wherein the discharge control unit, when the comparison result determined by the comparator unit satisfies the discharge stop predetermined condition, stops discharge from of the battery, and restarts discharge from of the battery in using a second discharge method~~procedure~~;

~~wherein in which the discharge rate of the second discharged procedure~~
is lower than that of the first discharge ~~method~~procedure.

4. (Currently Amended) An electronic timepiece according to claim 1, further comprising a discharge unit which forms a closed circuit with the battery; ~~and~~
~~wherein the discharge unit conducts a discharge current which flows from the battery through the closed circuit and lowers voltage stored on the battery.~~

5. (Currently Amended) An electronic timepiece according to claim 1,
wherein the discharge control unit ~~executes the discharges from the~~
battery by ~~controlling causing~~ the drive unit to drive the display section.

6. (Currently Amended) An electronic timepiece according to claim 1,
wherein the displaying section comprises a rotating mechanism driven by
~~an electric motor an electric motor and a rolling system driven by the electric~~
~~motor to change display of the displaying section, and,~~
the discharge control unit ~~executes the discharges from the battery by~~
~~controlling causing~~ the drive unit to ~~fast forward~~ increase the speed of the rolling
~~system rotating mechanism~~ of the displaying section.

7. (Currently Amended) An electronic timepiece according to claim 1, further comprising a charging state judge unit for ~~controlling causing~~ the drive unit to drive the displaying section ~~into using~~ a first displaying state procedure when a predetermined external input signal is received by the external input unit, and for ~~controlling causing~~ the drive unit to drive the displaying section ~~into using~~ a second displaying state procedure ~~which is different from the first displaying state when a comparison result determined by the comparator unit becomes satisfying to~~ satisfies a second predetermined condition.

8. (Currently Amended) An electronic timepiece according to claim 1, wherein the displaying section comprises a rotating mechanism driven by an electric motor, ~~and a rolling system driven by the electric motor and changing display of the displaying section, and said the electronic timepiece further comprises comprising:~~

a charging state judge unit for ~~controlling-causing~~ the drive unit to drive the displaying section ~~into-using~~ a first displaying state ~~procedure~~ when a predetermined external input signal is received by the external input unit, and for ~~controlling-causing~~ the drive unit to drive the displaying section ~~into-using~~ a second displaying ~~procedure~~ ~~state which is different from the first displaying state~~ when the ~~a~~ comparison result determined by the comparator unit becomes ~~satisfying to~~ satisfies a second predetermined condition,

a trouble detecting unit for detecting a drive ~~trouble-problem~~ ~~of-in~~ the electric motor, and,

a drive trouble judge unit for ~~controlling-causing~~ the drive unit to drive the displaying section ~~into-using~~ a third displaying state ~~procedure~~ when a predetermined external input signal is received by the external input unit, and for ~~controlling-causing~~ the drive unit to drive the displaying section ~~into-using~~ a fourth displaying state ~~procedure~~ ~~which is different from the third displaying state~~ when a drive ~~trouble-problem~~ is detected by the trouble detecting unit.

9. (Currently Amended) An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a displaying section for displaying time;

a battery;

a drive unit for driving the displaying section by use of electrical power stored in the battery;

a comparator unit for comparing a voltage corresponding to a voltage stored ~~on-in~~ the battery ~~or a voltage corresponding to the voltage~~ with a reference voltage; and

a charging state judge unit for ~~controlling-causing~~ the drive unit to drive the displaying section ~~into-using~~ a first displaying state ~~procedure~~ when a predetermined external input signal is received by the external input unit, and for ~~controlling-causing~~ the drive unit to drive the displaying section ~~into-using~~ a second displaying state ~~procedure~~ ~~which is different from the first displaying state~~ when the ~~a~~ comparison result determined by the comparator unit becomes ~~satisfying to~~ satisfies a predetermined condition;

10. (Currently Amended) An electronic timepiece according to claim 9,

wherein the charging state judge unit ~~for controlling~~ causes the drive unit to drive the displaying section ~~into~~ using the first displaying state ~~procedure~~ when ~~the~~ a comparison result determined by the comparator unit becomes satisfying to ~~a~~ does not satisfy predetermined condition and then becomes ~~unsatisfying to the predetermined condition.~~

11. (Currently Amended) A ~~check~~ method for checking an electronic timepiece comprising: ~~an external input unit for inputting an external input having a~~ charge storage unit and a time display;

~~a displaying section for displaying time;~~

~~a battery;~~

~~a drive unit for driving the displaying section by use of electrical power stored in the battery;~~

~~a comparator unit for comparing a voltage stored on the battery or a voltage corresponding to the voltage with a reference voltage;~~

~~a discharge control unit for starting discharge of the battery when a first external input ordering a discharge start is received by the external input unit, and for stopping the discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition; and~~

~~a charging state judge unit for controlling the drive unit to drive the displaying section into a first displaying state when a second external signal is received by the external input unit, and for controlling the drive unit to drive the displaying section into a second displaying state which is different from the first displaying state when the comparison result by the comparator unit becomes satisfying to a predetermined condition,~~

~~the said method comprising:~~

~~a first step of~~ initiating a discharging of the charge storage unit in response to a first external signal ~~controlling the voltage stored on the battery by giving the first external input signal from the external input unit and thereby starting the operation of the discharge control unit;~~

~~a second step of~~ controlling the time display in accord with a measure of the voltage of charge storage unit in response to a second external signal, judging the voltage stored on the battery or a voltage corresponding to the voltage from

~~the displaying state of the displaying section by giving the second external input signal to the external input unit and thereby starting the operation of the charging state judge unit.~~

12. (Currently Amended) ~~A~~ The ~~check~~ method according to of claim 11, wherein:

~~the electronic timepiece wherein the external input unit comprises a further includes a first and a second switch; for adjusting time on the displaying section;~~

~~in the first step, the first external input signal is generated by operation to of the first switch;~~

~~in the second step, the second external input signal is generated by operation to the second switch; and;~~

~~during or after the second step, a time setting is adjusted with by operation of the first switch.~~

13. (Currently Amended) A ~~check~~ method for checking an electronic timepiece comprising having a charge storage unit, a time display, and an electric motor,

~~an external input unit for receiving an external input signal;~~

~~a displaying section for displaying time, the displaying section including an electric motor and a rolling system driven by the electric motor and changing display of the displaying section;~~

~~a battery;~~

~~a drive unit for driving the motor of the displaying section using with electrical power stored in the battery;~~

~~a comparator unit for comparing voltage stored in the battery with a reference voltage;~~

~~a discharge control unit for starting discharge of the battery when an external input signal ordering start of discharge start is input with the external input unit, and for stopping the discharge when comparison result by the comparator unit satisfies a discharge stop condition;~~

~~a charging state judge unit for controlling the drive unit to drive the displaying section into a first displaying state when a predetermined external signal is received by the external input unit, and for controlling the drive unit to~~

~~drive the displaying section into a second displaying state which is different from the first displaying state when the comparison result by the comparator unit becomes satisfying to a predetermined condition;~~

~~a trouble detecting unit for detecting a drive trouble of the electric motor;~~
~~and~~

~~a drive trouble judge unit for controlling the drive unit to drive the displaying section into a third displaying state when a predetermined external signal is received by the external input unit, and for controlling the drive unit to drive the displaying section into a fourth displaying state which is different from the third displaying state when a drive trouble is detected by the trouble detecting unit;~~

~~the said method comprising the steps of:~~

~~a first step of initiating a discharging of the charge storage unit in response to a first external signal starting the operation of the discharge control unit, and controlling the voltage of the stored electricity of the battery by using an input of a first prescribed external signal as a start condition;~~

~~a second step of controlling the time display in accord with a measure of the voltage of charge storage unit in response to a second external signal starting the operation of the charging state judge unit, and controlling the displaying state of the displaying section in accordance with the voltage of the stored electricity of the battery by using an input of a second prescribed external signal as a start condition; and~~

~~a third step of in response to a third external signal, monitoring the electric motor for drive problems and controlling the time display to indicate any found problem starting the operation of the drive trouble judge unit, and controlling the displaying state of the displaying section based on the detection result of the drive trouble of the electric motor by using an input of a third prescribed external signal as a start condition.~~

14. (Currently Amended) ~~A The echeck method for the electronic timepiece according to of claim 13, wherein:~~

~~the time piece further includes wherein the external input unit comprises a first and a second switch for adjusting time on the displaying section;~~

the first external ~~input~~ signal is generated by operation ~~to~~ of the first switch;

the second external ~~input~~ signal is generated by operation ~~to~~ of the second switch; and,

during or after the second step, a time setting is adjusted by operation of the first switch.

15. (Currently Amended) An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit ~~for notifying a user~~ for issuing a notification to a user;

a battery;

a comparator unit ~~for measuring~~ comparing the a voltage corresponding to a voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;

a charge state judge unit ~~for causing~~ controlling a notification state of the notification unit to issue the notification using a first state notification procedure when a predetermined external signal ~~with the is received~~ external input unit is input, and ~~for controlling~~ causing the notification unit to issue the notification a notification state of the notification unit to using a second notification procedure state which is different from the first notification state ~~when after the first state the battery unit is charged and the a comparison result determined by the comparator unit becomes satisfying to~~ satisfies a predetermined condition.

16. (Currently Amended) An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit ~~for notifying a user~~ providing a notification to a user;

a battery;

a comparator unit ~~for measuring~~ comparing a voltage corresponding to a the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;

a discharge control unit for starting discharge of the batter when a predetermined external input signal is input with the external input unit received, and for stopping discharge of from the battery when the a comparison

result determined by the comparator unit ~~becomes satisfying to a discharge step~~
satisfies a predetermined condition; and

a charge state judge unit for ~~controlling a notification state of causing the~~
notification unit to provide the notification using a first state notification
procedure when a second predetermined external signal is received with the
~~external input unit is input~~, and for ~~controlling causing the notification unit to~~
provide the notification using a notification state of the notification unit to a
second state notification procedure which is different from the first notification
state when after the first state the battery unit is charged and the a comparison
result determined by the comparator unit ~~becomes satisfying to a~~ satisfies a
second predetermined condition.

17. (Currently Amended) An electronic timepiece according to claim 16,

wherein the charge state judge unit ~~controls a notification state of causes~~
the notification unit to provide the notification using to the first state procedure
when ~~the a comparison result determined by the comparator unit becomes~~
~~satisfying to a predetermined condition, and then becomes unsatisfying to a~~ does
not satisfy the second predetermined condition.

18. (Currently Amended) An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a notification unit for ~~notifying~~ issuing a notification to a user,
comprising a displaying section including a rotating mechanism driven by with a
rolling system by an electric motor;

a battery;

a comparator unit for ~~measuring the voltage of the stored electricity for~~
comparing a voltage corresponding to a voltage stored in the battery and
~~comparing the voltage with a reference voltage~~;

a discharge control unit for starting discharge of the battery when a
predetermined external input signal is received input with the external input
unit, and for stopping discharge ~~from of the battery when the a comparison~~
result determined by the comparator unit ~~becomes satisfying to a discharge step~~
satisfies a predetermined condition;

a charge state judge unit for ~~causing controlling a notification state of the~~ notification unit ~~to issue the notification to a using a first state notification~~ procedure when a second predetermined external input signal is received with the external input unit is input, and for ~~controlling causing a notification state of~~ the notification unit ~~to issue the notification using to a second state notification~~ procedure ~~which is different from the first notification state~~ when after the first state the battery unit is charged and the a comparison result determined by the comparator unit ~~becomes satisfying to satisfies a second predetermined~~ condition;

a trouble detecting unit for detecting a drive ~~trouble problem of in the~~ electric motor; and

a drive trouble judge unit for ~~controlling causing a notification state of~~ the notification unit ~~to issue the notification using into a third state notification~~ procedure when a third predetermined external input signal is received is input with the external input unit, and for ~~controlling the notification state of causing~~ the notification unit ~~to issue the notification using into a fourth state procedure~~ which is different from the third state when a drive ~~trouble problem~~ is detected by the trouble detecting unit.

19. (Currently Amended) An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a displaying section for displaying time ~~comprising a rolling system~~ including a rotating mechanism driven by an electric motor;

a notification unit for issuing a notification to ~~notifying a user~~;

a battery;

a trouble detecting unit for detecting a drive ~~trouble problem of in the~~ electric motor; and

a drive trouble judge unit for ~~controlling a notification state of causing~~ the notification unit ~~to issue the notification using into a first state notification~~ procedure when a predetermined external signal is input with the external input unit received, and for ~~controlling causing the notification state of the notification~~ unit ~~to issue the notification using into a second state notification procedure~~

~~which is different from the first state when a drive trouble problem is detected by the trouble detecting unit.~~

20. (Currently Amended) An electronic timepiece comprising:

- ~~an external input unit for inputting-receiving an external input signal;~~
- ~~a displaying section for displaying time, said displaying section including comprising a rolling system a rotating mechanism driven by an electric motor;~~
- ~~a battery;~~
- ~~a drive unit for driving the displaying section by use of electrical power stored in the battery;~~
- ~~a trouble detecting unit for detecting a drive trouble problem of in the electric motor; and~~

- ~~a drive trouble judge unit for controlling causing a display state of the displaying section into a to be driven using a first state displaying procedure when a predetermined external signal is received input with the external input unit, and for controlling the display state of causing the displaying section to be driven using into a second state display procedure which is different from the first state when a drive trouble problem is detected by the trouble detecting unit.~~

21. (Currently Amended) A ~~check~~ method for checking an electronic timepiece ~~comprising including~~ a battery and a notification unit for issuing a notification to a user, ÷

- ~~an external input unit for receiving an external input signal;~~
- ~~a notification unit for notifying a user;~~
- ~~a battery;~~
- ~~a comparator unit for measuring the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;~~
- ~~a discharge control unit for starting discharge when a predetermined external input is input with the external input unit, and for stopping discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition; and~~
- ~~a charge state judge unit for controlling a notification state of the notification unit to a first state when a predetermined external signal with the external input unit is input, and for controlling a notification state of the~~

~~notification unit to a second state which is different from the first notification state when after the first state the battery unit is charged and the comparison result by the comparator unit becomes satisfying to a predetermined condition,~~
~~the said method comprising the steps of:~~

~~a first step of starting the operation of the discharge control unit, and controlling the voltage of the stored electricity of a discharge of the battery by using an input of a in response to a first prescribed predetermined external signal as a start condition; and~~

~~a second step of starting the operation of the charging state judge unit, and controlling the notification state of the notification unit to issue the notification in accordance with the voltage of the stored electricity of the battery by using an input of a in response to a second prescribed predetermined external signal as a start condition.~~

22. (Currently Amended) A check method for checking an electronic timepiece comprising: including a battery, a notification unit for issuing a notification to a user, an electric motor, and a self-diagnostic system,

~~an external input unit for receiving an external input signal;~~

~~a notification unit for notifying a user comprising a displaying section with a rolling system by an electric motor;~~

~~a battery;~~

~~a comparator unit for measuring the voltage of the stored electricity in the battery and comparing the voltage with a reference voltage;~~

~~a discharge control unit for starting discharge when a predetermined external input is input with the external input unit, and for stopping discharge from the battery when the comparison result by the comparator unit becomes satisfying to a discharge stop condition;~~

~~a charge state judge unit for controlling a notification state of the notification unit to a first state when a predetermined external signal with the external input unit is input, and for controlling a notification state of the notification unit to a second state which is different from the first notification state when after the first state the battery unit is charged and the comparison result by the comparator unit becomes satisfying to a predetermined condition;~~

~~a trouble detecting unit for detecting a drive trouble of the electric motor;~~
and

~~a drive trouble judge unit for controlling a notification state of the notification unit into a third state when a predetermined external signal is input with the external input unit, and for controlling the notification state of the notification unit into a fourth state, which is different from the third state when a drive trouble is detected by the trouble detecting unit,~~

~~the said method comprising the steps of:~~

~~a first step of starting the operation of the discharge control unit, and controlling the voltage of the stored electricity a discharge of the battery by using an input of in response to a first prescribed predetermined external signal as a start condition;~~

~~a second step of starting the operation of the charging state judge unit, and controlling the notification state of the notification unit to issue the notification in accordance with the voltage of the stored electricity of the battery by using an input of in response to a second prescribed predetermined external signal as a start condition;~~ and,

~~a third step of starting the operation of the drive trouble judge unit, and controlling the notification state of the notification unit to issue the notification based on a diagnosis the detection result of the drive trouble of the electric motor by the self-diagnosis system using an input of in response to a third prescribed predetermined external signal as a start condition.~~

23. (Currently Amended) An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a user notification unit for notifying a user of providing prescribed information, including time information, comprising said user notification unit including a displaying section with a rolling system rotating mechanism driven by an electric motor;

a battery;

a drive unit for driving the user notification unit by use of electrical power stored in the battery;

a comparator unit for comparing a voltage corresponding to a voltage of the stored electricity in the battery with a reference voltage;

a discharge control unit for starting discharge of the battery when a predetermined external input signal is input with the external input unit received, and for stopping discharge from of the battery when the a comparison result determined by the comparator unit becomes satisfying to a discharge step satisfies a predetermined condition;

a trouble detecting unit for detecting a drive trouble problem of in the electric motor; and

a drive trouble judge unit for controlling causing a notification state of the user notification unit into to provide information using a first state notification procedure when a second predetermined external signal is input with the external input unit is received, and for controlling the notification state of causing the notification unit to provide information using into a second state notification procedure which is different from the first state when a drive trouble problem is detected by the trouble detecting unit.

24. (Currently Amended) An electronic timepiece comprising:

an external input unit for receiving an external input signal;

a user notification unit for notifying a user of providing prescribed information, including time information, said user notification unit comprising including a displaying section with a rolling system rotating mechanism driven by an electric motor;

a battery;

a drive unit for driving the notification unit by use of electrical power stored in the battery;

a comparator unit for comparing a voltage corresponding to a of the stored electricity in the battery with a reference voltage;

a charge state judge unit for controlling causing a notification state of the user notification unit to provide information using a first state notification procedure when a predetermined external signal is received with the external input unit is input, and for controlling causing a notification state of the user notification unit to provide information using a second state procedure which is

~~different from the first notification state when after the first state the battery unit is charged and the~~ a comparison result determined by the comparator unit ~~becomes satisfying to~~ satisfies a predetermined condition;

a trouble detecting unit for detecting a drive ~~trouble problem of in~~ the electric motor; and

a drive trouble judge unit for ~~causing controlling a notification state of the user notification unit into to provide information using a third state procedure when a second predetermined external signal is input with the external input unit is received, and for controlling causing the notification state of the user notification unit to provide information using into a fourth state procedure which is different from the third state when a drive trouble problem is detected by the trouble detecting unit.~~

25. (New) An electronic timepiece comprising:

an external input unit configured to receive an external input signal;

a displaying section configured to display time;

a battery;

a drive unit configured to drive the displaying section by use of electrical power from the battery;

a comparator unit configured to compare a voltage corresponding to a voltage stored in the battery with a reference voltage,

a discharge control unit configured to start discharge of the battery in response to said external input unit receiving a predetermined external input signal, and to stop discharge of the battery in response to a comparison result determined by the comparator unit satisfying a predetermined condition.

26. (New) An electronic timepiece according to claim 25,

wherein the discharge control unit is configured to resume discharge of the battery in response to a comparison result, which is determined by the comparator unit, not satisfying the predetermined condition.

27. (New) An electronic timepiece according to claim 26,

wherein the discharge control unit is further configured to start discharge of the battery with a first discharge procedure in response to a said

external input unit detecting the reception of a predetermined external signal;
and

wherein the discharge control unit is configured to stop the current discharge of the battery operation and to restart the discharge of the battery with a second discharge procedure in response to the comparison result from the comparator unit satisfying the predetermined condition;

wherein the discharge rate of the second discharged procedure is configured to be lower than that of the first discharge procedure.

28. (New) An electronic timepiece according to claim 25, further comprising a discharge unit that forms a closed circuit with the battery;

wherein the discharge unit is configured to conduct discharge current from the battery through the closed circuit.

29. (New) An electronic timepiece according to claim 25,

wherein the discharge control unit is further configured to discharge the battery by causing the drive unit to drive the display section.

30. (New) An electronic timepiece according to claim 25,

wherein the displaying section comprises a rotating mechanism driven by an electric motor; and

the discharge control unit is configured to discharge the battery by causing the drive unit to increase the speed of the rotating mechanism of the displaying section.

31. (New) An electronic timepiece according to claim 25, further comprising a charging state judge unit configured to cause the drive unit to drive the displaying section using a first displaying procedure in response to a predetermined external input signal received by the external input unit, and configured to cause the drive unit to drive the displaying section using a second displaying procedure when a comparison result determined by the comparator unit satisfies a second predetermined condition.

32. (New) An electronic timepiece according to claim 25, wherein the displaying section comprises a rotating mechanism driven by an electric motor, said electronic timepiece further comprising:

- a charging state judge unit configured to cause the drive unit to drive the displaying section using a first displaying procedure when the external input unit detects reception of a predetermined external input signal, and for causing the drive unit to drive the displaying section using a second displaying procedure when a comparison result determined by the comparator unit satisfies a second predetermined condition;

- a trouble detecting unit configured to detect a drive problem in the electric motor; and

- a drive trouble judge unit configured to cause the drive unit to drive the displaying section using a third displaying procedure when a predetermined external input signal is received by the external input unit, and further configured to cause the drive unit to drive the displaying section using a fourth displaying procedure when a drive problem is detected by the trouble detecting unit.

REMARKS

The Specification is amended to correct grammatical and idiomatic errors. The Specification is further amended to clarify existing descriptions. For example, the specification explained that a power supply could be implemented as a large capacitor or as a battery, and then alternated the use of the words capacitor and battery. The specification is amended to more consistently use the generic term "power supply" in place of alternating examples of a power supply.

Claims 1-32 are presented for examination. Claims 1-24 have been amended to address idiomatic errors and to place them in better form for U.S. Practice. Claims 25-32 are new.

No new matter is added by the present amendments.

Favorable consideration is respectfully requested.

Respectfully submitted,




Rosalio Haro

Registration No. 42,633

Please address all correspondence to:
Epson Research and Development, Inc.
Intellectual Property Department
150 River Oaks Parkway, Suite 225
San Jose, CA 95134
Phone: (408) 952-6000
Facsimile: (408) 954-9058
Customer No. 20178
Date: October 5, 2004

FIG. 4

401: OPERATION CHECK FUNCTION CONTROL CIRCUIT

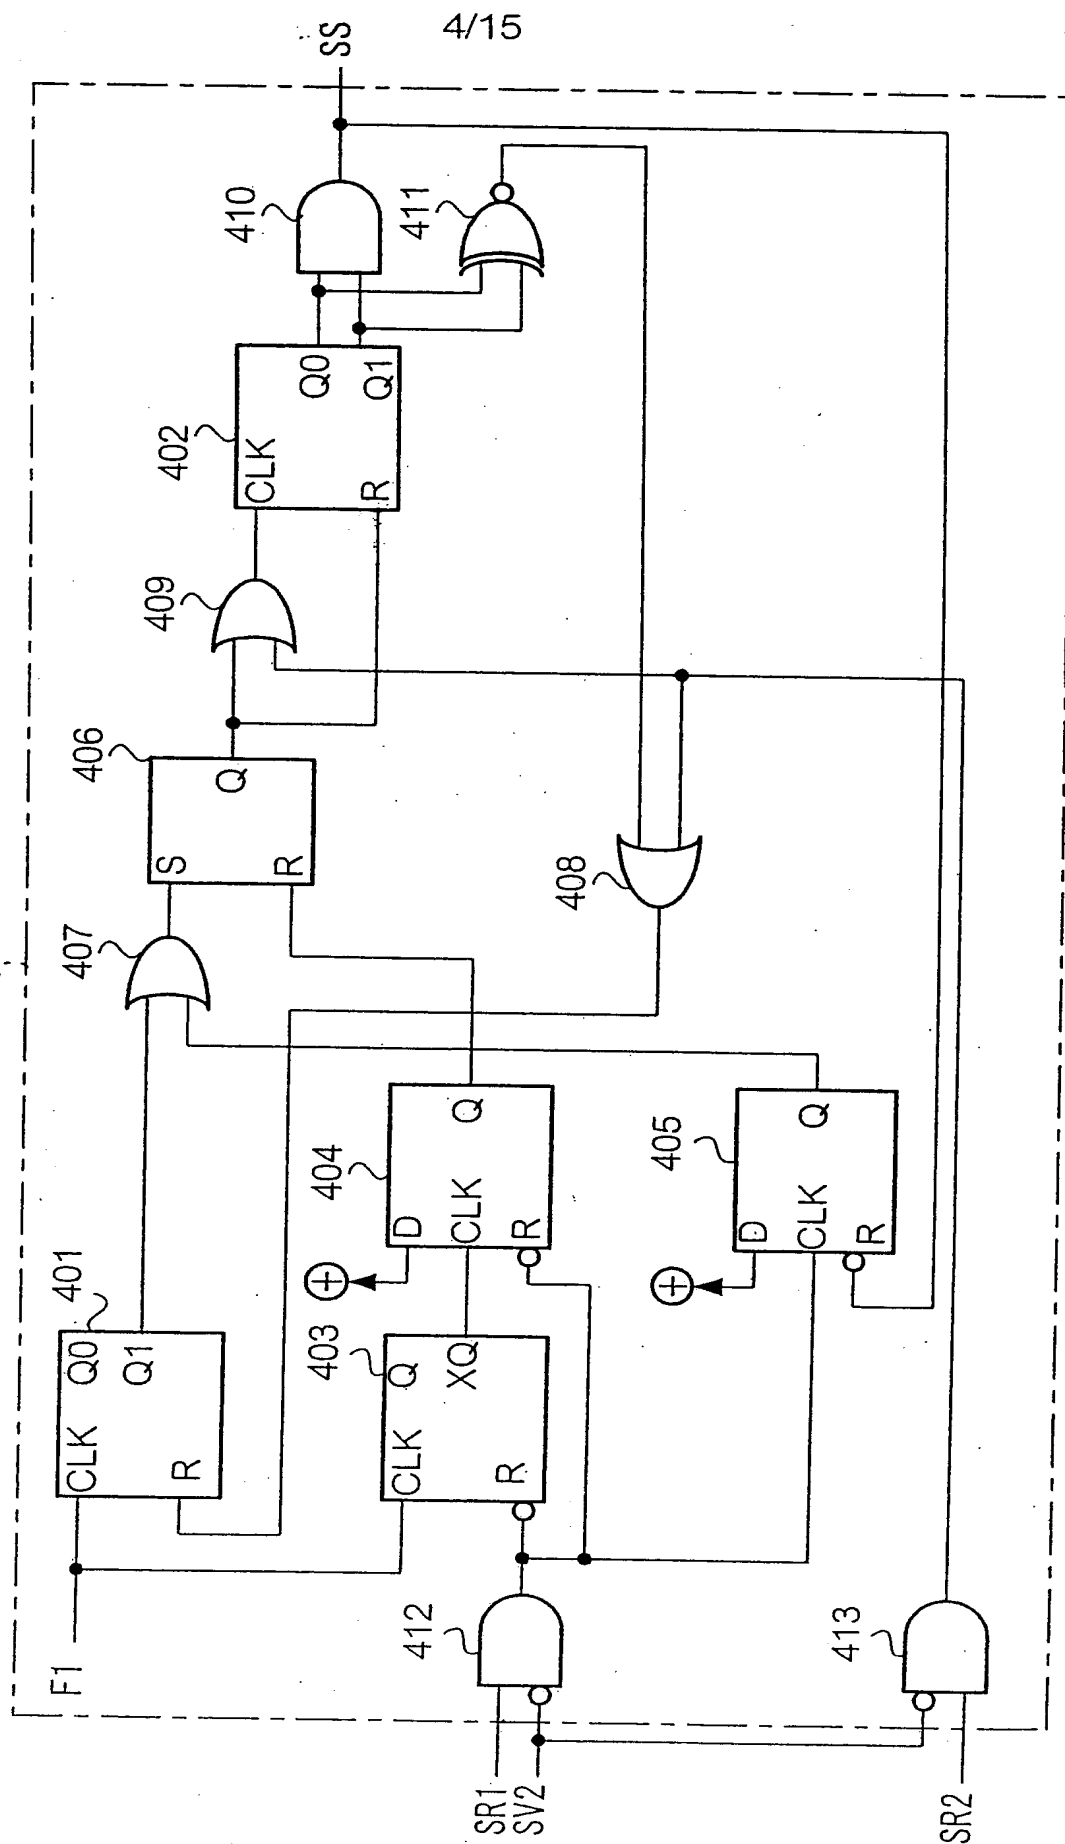

Version of Substitute Specification With Markings to Show Changes

**Electronic Timepiece With Checking Function, And Its Checking Method
Therefor**

Inventors: Shinji Nakamiya
Katsuyoshi Takahashi

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] This invention relates to an electronic timepiece ~~operating by the power supply of~~ powered by a charge~~rechargeable~~ battery, and to a checking method for the timepiece.

Description of the Related Art

[0002] There ~~are~~ exists a variety of portable electronic timepieces such as wristwatches and ~~electrical~~ electric clocks. Some of these timepieces have ~~chargeable~~ a rechargeable power source such as ~~chargeable~~ rechargeable batteries or large-capacitance capacitors. ~~And in some others have removable,~~ battery units ~~are constructed as removable unit.~~ In these timepieces, time-keeping units and digital (or analog) displaying units for displaying time ~~conduct operation~~ operate by using ~~the electrical~~ electric power stored ~~on in the batteries~~ power source.

[0003] FIG. 11 ~~shows~~ is a flowchart showing ~~one~~ an example of a manufacturing process and a checking process for a timepiece with a battery and a charging means for the battery.

[0004] ~~As for~~ In FIG. 11, discharging step (step A101) is ~~done~~ conducted before the remaining steps in the manufacturing process of the ~~electrical~~ electric timepiece.

[0005] In ~~this~~ discharging step A101, by ~~using~~ use of an external discharging circuit, ~~for example as such as that shown in FIG. 12,~~ the battery alone is discharged ~~alone~~. In the external discharging circuit 100 shown in FIG. 12, a plurality of (~~n piece of~~) batteries (i.e. n batteries) from BA1 to BAn are placed on a battery placing mounting section 101. Each battery from BA1 to BAn is connected in series to a resistor from R1 to Rn, respectively. A sink type constant voltage power source 102 is connected in parallel to each of the above series-connected resistors and batteries. ~~By~~ In the above-configured external discharging circuit 100, batteries ~~from~~ BA1 to BAn are discharged at the same time. In this case, the number of installation terminals for the batteries in the external discharging circuit

100 ~~have~~has to be enough for the number of batteries to be discharged at the same time.

[0006] After ~~this~~ battery discharging step (~~step~~ A101), an assembling step (~~step~~ A102) and an exterior installation step (~~step~~ A103) isare conducted. Then a battery charging step (~~step~~ A104) is conducted.

[0007] In this charging step A104, the quality of the charging function of the battery is examined, and enough ~~electrical~~electric energy for ~~the~~ ~~electrical~~ timepiece operation in of the next step ~~ef~~ (i.e. an operation checking step (~~step~~ A105)) is stored in the battery. Charging is conducted in the following ways. For example, ~~for~~ In a timepiece with having a rotating type generator, ~~giving a vibration to causing the timepiece to vibrate~~ moves an oscillation weight in the rotating-type generator of the timepiece, ~~and~~—A kinetic energy generated in the oscillation weight ~~in this process~~ is converted by the generator into ~~electrical~~electric energy, and then ~~the electrical energy which~~ is subsequently stored in the battery. And ~~in~~ other type of In a timepiece such as with having a solar panel, electric energy is generated ~~ion~~ is conducted by the solar panel, and the generated ~~electrical~~electric energy is stored in the battery. And In yet ~~in~~ another type of timepiece, it is possible to generate electric energy from ~~use for generation~~ an inductive energy source, ~~in accordance with such as~~ an exterior radio wave or a magnetic force, and to thereby charge the battery.

[0008] Confirmation of a charging state is conducted ~~in the following ways~~ as follows. ~~In~~ in the charging step, an operator ~~puts~~ activates a charging state display function ~~into action, the charging state display function being that is~~ installed in the timepiece. And ~~the~~ The operator then checks the displaying state of the timepiece, and to confirms whether ~~or not the charging the battery is~~ overcharged.

[0009] ~~The~~ Battery discharging step (~~step~~ A101) mentioned above ~~is done in order is implemented to, at this charging step, control an maintain the accuracy of the monitoring of battery voltage inspection in the charging step to within a certain range.~~

[0010] In ~~the~~ operation checking step (~~step~~ A105), a quality verification for the ~~electrical~~electric timepiece is conducted. This quality verification comprises timepiece operation verification ~~in~~ at high and ~~cold~~low temperatures. ~~In detail~~ Specifically, in the operation checking step, a trial operation lasting several hours or several tens of hours is conducted at around an ambient temperature of about 60 degree centigrade of high temperature atmosphere and around at an ambient temperature of about minus 10 degree centigrade of low temperature atmosphere, a trial operation extending several hours or several tens of hours is

conducted. ~~In~~ During this trial operation period, the timepiece is checked for a stoppage and for a delay of in displayed time display is checked. ~~And Then,~~ by confirming a continuous discharging time of the battery after the trial operation, a quality confirmation (judgment) is conducted.

[0011] ~~After the operation checking step A105,~~ a shipment checking step (step A106), ~~with including an exterior checking,~~ and a full-charging step (step A107) to ~~full fully~~ charge the battery ~~is are~~ conducted, and then the timepiece is shipped (step A108).

[0012] ~~Incidentally~~ It is to be noted, in the battery discharging step explained above, ~~discharging the battery is conducted alone~~ is discharged by using the external discharging circuit before ~~the assembling assembly.~~ ~~And and that~~ discharging time requires the battery requires from several to several tens of hours. Therefore, a discharging circuit facility with requires enough number of, for example enough for one day production of timepiece, battery installation terminals for the batteries is necessary for one day's production. Hence, this discharging method is not appropriate for a model produced on a massive scale.

[0013] ~~And Also~~ if, for example, after the shipment, ~~an operation verification operation for of~~ a discharging function is required, it is very difficult for the battery to be ~~made on a certain discharging state~~ discharged to a predetermined level without a discharging facility.

[0014] Moreover, there are several kinds of ~~battery~~ batteries. Even among lithium type ~~battery~~ batteries, discharging characteristics differs, for example, according to types of electrodes, as shown in FIG. 13. ~~And chargeable~~ Also, rechargeable batteries ~~battery has have~~ a characteristic of voltage recovery effect by which, after ~~stopping discharging is stopped,~~ voltage rises. Therefore battery voltage is unstable and becomes ~~wide dispersed~~ after discharging. This voltage dispersion after discharging ~~causes a disadvantageous effect~~ adversely affects ~~on the accuracy of checking accuracy.~~

[0015] ~~And Furthermore~~ by purchasing a certain switch while in the charging step, for example, a charging state, such as charging voltage, is ~~displayed indicated~~ by ~~the an~~ amount of fast-forwarding movement of the analog second hand on the displaying section, ~~by pushing a certain switch.~~ In this case, an external operation such as pushing a certain switch or the like is necessary to ~~confirm determine~~ the charging state. Hence an external input is required, ~~and resulting in a problem of necessitating a further more operation process.~~ ~~And Also,~~ since ~~confirmation is done by a use~~ confirms a charging state by observing the amount of fast-forwarding movement of the analog second hand, ~~if the amount of fast forwarding movement is~~

~~wrongly recognized, there is a possibility that checking result falls in a fault judgment of misjudgment due to human error.~~

[0016] ~~And Additionally~~ in the operation checking step, ~~the quality verification for~~ of the ~~electrical electric~~ timepiece is conducted by checking ~~the its~~ operation ~~under~~ at both a high and low ambient temperatures ~~atmosphere~~. More precisely, quality verification of the timepiece is conducted by checking whether or not the time piece experiences there is a stoppage (continuous time-keeping trouble) or a time delay under the above conditions, the quality verification of the timepiece is conducted. Therefore even when ~~the trouble a problem~~ is detected in the timepiece, it is difficult to ~~identify determine whether the cause of the trouble problem whether it~~ is due to the motor drive unit or due to the battery.

[0017] ~~In order to To~~ confirm that ~~it a problem~~ is due to a motor drive trouble, it is ~~required necessary~~ to examine even a gear train unit ~~for that drives driving an~~ hour hand, a minute hand and a second hand. ~~And in order to do To~~ conduct this examination, it is ~~required necessary~~ to dismantle break the timepiece up by to a considerable extent requiring fine detail. Hence, in order to ~~prevent avoid this complicated breaking up work and dismantling examination procedure,~~ there is a demand for simplifying the distinction that distinction between a problem due to the motor drive trouble and a problem due to another factor be made as easy as possible. However, in the prior arts ~~timepiece,~~ it is difficult to ~~make a distinction distinguish~~ between ~~the a motor drive trouble problem and a problem due to another factor.~~

[0018] ~~And as for the Regarding~~ motor drive trouble, ~~as long as the when a motor is does not apparently appear to be of low poor quality,~~ it is not possible to judge that the trouble is due to the motor. ~~But However,~~ for example, there is ~~some~~ exist some low quality motors which, under some temperature conditions, works and does not without causing a delay. Ideally, ~~this kind of such~~ motors should also be judged ~~as to cause motor problems.~~ However it is difficult to make such a ~~judgement judgment.~~

[0019] ~~By t~~Taking the above situation into ~~considering consideration,~~ the object of the present invention is to provide an ~~electrical electric~~ timepiece with a checking function which, for example, in the timepiece manufacturing process ~~enhances improves~~ the checking accuracy and efficiency, and a checking method for the timepiece.

Objects of the Invention

[0020] Therefore, it is an object of the present invention to overcome the aforementioned problems.

Summary of the Invention

[0021] ~~In order to~~ To solve the above problems, in the timepiece of the present invention, ~~a timepiece~~ comprises an external input unit for receiving an external signal, a display section for displaying the time, a battery unit capable of being recharged, a drive unit for driving the display section ~~by using the electrical electric power stored in the battery unit~~, a comparator unit, and a discharging control unit. The comparator unit ~~detects a~~ monitors the voltage of the battery unit, and compares the voltage with a reference voltage. The discharging control unit, ~~when, via the external input terminal, a prescribed signal enters~~ is input via the external input terminal, starts discharging ~~from the battery unit~~, and when the ~~detected result by the comparator unit satisfies~~ detects a prescribed condition, stops ~~the discharging from the battery unit~~.

[0022] ~~By the~~ The present invention, ~~it is possible to~~ provides the following advantages:- ~~Being able to check the timepiece operation more accurately and efficiently can be checked with improved accuracy and efficiency:-~~ Unnecessity of an external circuit for discharging the battery in the manufacturing process is unnecessary; and, Being able to lower the voltage dispersion of the battery can be lowered before and after and before charging.

Brief Description of the Drawings

[0023] FIG. 1 is a block diagram showing a construction of ~~the a~~ a timepiece of one embodiment of the present invention.

[0024] FIG. 2 is a flowchart showing a ~~flow process~~ process of manufacturing and checking ~~process of the timepiece~~.

[0025] FIG. 3 is a block diagram showing constructions of each part of the timepiece.

[0026] FIG. 4 is a circuit diagram showing the construction of the operation check function control circuit 310 shown in FIG. 3.

[0027] FIG. 5 is a circuit diagram showing a second external input unit measure circuit 311, operation check function mode select circuit 312, a stored electricity unit discharge control circuit 305, a stored electricity unit charging completion detect circuit 306, and a motor drive trouble detect circuit 304 shown in FIG. 3.

[0028] FIGS. 6A and 6B are timing charts showing operation of the operation check function control circuit 310 shown in FIG. 3.

[0029] FIG. 7 is an exemplary operational timing chart showing one example of operations of each unit the structure shown in FIG. 3.

[0030] FIG. 8 is a block ~~chart~~ diagram explaining a discharging current in a motor drive unit E shown in FIG. 3.

[0031] FIGS. 9A, 9B and 9C ~~cooperate to collectively~~ form a flowchart showing flow of operation and checking process of the timepiece of the present invention.

[0032] FIG. 10 is ~~a diagram showing a specification of the operation and checking~~ a diagram explaining modes 1 to 3 of the operation check process.

[0033] FIG. 11 is a flowchart showing an operation and checking process of ~~the a~~ timepiece ~~of~~ according to prior arts.

[0034] FIG. 12 is a circuit showing an external discharging circuit for batteries of according to prior arts for batteries.

[0035] FIG. 13 is a diagram showing discharging characteristics of two types of lithium ~~chargeable~~ rechargeable battery (MT: which uses manganese and titanium for electrode, CT: which uses titanium and carbon for electrode).

Description of the Preferred Embodiments

[0036] ~~From here, by using~~ With reference to the drawings, one embodiment of present invention will be described. FIG. 1 is a block diagram which shows a construction of the timepiece 1 of one embodiment of the present invention. In FIG. 1, the timepiece 1 is a wristwatch. ~~User of this wristwatch wears it by using a belt attached to the apparatus.~~ The electrical electric timepiece 1 comprises a generator system A, a power supply system B, a control unit C, a motor unit D, a motor drive circuit E, a first external input terminal F, and a second external input terminal G. Brief A brief explanations of these parts are as the operation of these components follows. The generator system A generates alternating current. The power supply system B rectifies the alternating current, then stores the generated energy into the battery unit 48, and then raises or lowers the stored voltage, and then supplies ~~the electricity to each constructing parts~~ power to the electrically driven components. The control unit C controls the entire timepiece 1. The motor unit D comprises a second hand 61, a minute hand 62, a hour hand 63, and a stepping motor 10 for moving the hands. The motor drive circuit E is a circuit for driving the stepping motor 10 in the motor unit D, based on a control signal from the control unit C. The first external input unit F and the second external input unit G are means for

changing modes in an operation ~~checking mode-process-in-turn~~. This operation ~~check function-process~~ is one feature of the timepiece 1 of the present invention.

[0037] The generator system A comprises a generating apparatus 40, an oscillating weight 45, and an acceleration gear 46. The generating apparatus 40 in FIG. 1 is an electromagnetic induction type AC generator apparatus. The electromagnetic induction type AC generator apparatus comprises a generator rotor 43, a generator stator 42, and a generator coil 44. The oscillating weight 45 is a means for providing the generator rotor 43 with ~~an energy~~. In this wristwatch type electrical electric timepiece 1, the oscillating weight 45 is ~~driven-made~~ to rotate by movement of a user's arm. The movement of the oscillating weight 45 is transmitted to a generator rotor 43, ~~via the an acceleration gear 46, is transmitted to a generator rotor 43~~. Then the generator rotor 43 rotates in a generator stator 42. ~~Then thus~~ voltage is induced in the generator coil 44. The voltage is output ~~to between from~~ two output terminals of the generator coil 44. In this way, in the generator system A, power generation is done-achieved by use of energy related to the user's everyday life.

[0038] The power supply system B comprises a rectifier circuit 47, a battery (a battery unit) 48 and a voltage raising and lowering circuit 49. The alternating voltage from the generator system A is rectified by the rectifier circuit 47 into a direct voltage, and is stored in the battery (the battery unit) 48. The battery unit 48 comprises a large-capacitance capacitor or a ~~chargeable~~rechargeable battery such as a lithium battery. The direct voltage stored in the battery 48 is supplied to the voltage raising and lowering circuit 49. The voltage raising and lowering circuit 49 is a circuit for, by using more than one of capacitors ~~of from 49a to 49c~~, raising or lowering the direct voltage by multiple-times factors. The output voltage of the voltage raising and lowering circuit 49 is controllable by a control signal $\phi 11$ from the control unit C.

[0039] In the structure shown in FIG. 1, ~~a voltage VDD of higher electric potential side of the battery 48 (higher electric potential side voltage)~~ is ~~described-identified~~ as a reference electric potential GND. ~~And a~~ The lower electric potential side voltage of the battery 48 is described-identified as a first voltage low reference VTKN (a first lower electric potential side voltage), ~~And and~~ a second voltage on the lower electric potential side voltage of the raising and lowering circuit 49 is described-identified as a second lower electric potential side voltage low reference VSS. Output voltage of the generator coil 44 is input to the control unit C as a control signal $\phi 13$. ~~A voltage value of v~~ Voltage VSS is input to the control unit C as a control signal $\phi 12$.

[0040] A motor drive circuit E creates a drive pulse based on a drive clock supplied from ~~the~~ control unit C, and then provides the drive pulse to a stepping motor 10 in ~~the~~ motor unit D. ~~The~~ Stepping motor 10 comprises a rotator section. The rotator section rotates by a fixed degree amount when ~~the~~ a drive pulse is ~~supplied~~ applied to ~~the~~ stepping motor 10. The rotation of the rotating part of ~~the~~ stepping motor 10 is transmitted to ~~the~~ second hand 61 by way of a second intermediate wheel 51 and a second wheel 52, both wheels being connected to the rotating part. ~~Then~~ ~~t~~ The second hand thus rotates providing an indication of the passage of time in seconds, ~~and the second indication is conducted.~~ And Additionally, the rotation of the second wheel 52 is transmitted to a minute intermediate wheel 53, a minute wheel 54, an hour intermediate wheel 55, and an hour wheel 56. The minute wheel 54 is connected to a minute hand 62. The hour wheel 56 is connected to a hour hand 63. Therefore these hands ~~works together in conjunction~~ with the rotation of ~~the~~ stepping motor 10, ~~And and thereby indicate the passage of time in hours and minutes indications are conducted.~~

[0041] Although not described in the drawings, it is possible to connect other transmission systems to the gear train 50 which is constructed ~~by of~~ wheels ~~from~~ 51 to 56 in order to display a calendar and so on. For example, ~~in order to~~ display a date, it is possible to ~~put~~ add a cylindrical intermediate wheel, an intermediate date wheel, and a date wheel and so on. ~~And Further~~ still, it is possible to ~~put~~ add a calendar correction gear train (such as a first calendar correction wheel, a second calendar correction wheel, a calendar correction wheel, and a date disc).

[0042] The first external input unit F comprises a crown for setting time ~~setting~~ and a circuit for electrically detecting the time-setting operation ~~electrically~~. In this embodiment, the second external input unit G is used as a switch for starting ~~the~~ an operation check function of the timepiece 1 ~~has~~. The second external input terminal G is an indicator switch installed on the exterior section of the wristwatch. The second external input terminal G is used ~~when confirming to confirm~~ the charging state of ~~the~~ battery 48. ~~And also~~ Also in this embodiment, the second external input terminal G is used as a switch for inputting a signal to change between modes ~~of~~ ~~from~~ 1 to 3 while ~~operating~~ performing the operation check process (B100). Operation state of the first external input unit F and the second external input unit G is input to the control unit C in ~~electrical~~ the form of an electric signal.

[0043] ~~Here, by referring~~ With reference to FIG. 2, an outline of the operation check process realized ~~in of~~ this embodiment will be described. FIG. 2 is a flowchart showing an example of a manufacturing and checking process of the ~~electrical~~ electric timepiece of the present embodiment. The operation check process B100 is

conducted after the manufacturing process (step A102) and the exterior installation process (step A103). The operation check process B100 ~~is composed of~~ has three ~~processes~~ steps (step B101, step B104, and step B105). These three ~~processes~~ is steps are conducted by using ~~each~~ functions of modes ~~from~~ 1 to 3 which ~~the~~ are present in the timepiece ~~has in itself~~.

[0044] The first process (step B101) of the operation check process B100 is ~~corresponding~~ corresponds to discharging step A101 in FIG. 11. The first process is ~~conducted~~ executed as a preparation process ~~step~~ for checking the charging function of the timepiece 1. In the ~~this~~ first process, by use of mode 2 function of the timepiece 1, starts an electrical ~~electric~~ power consumption circuit ~~is put to start~~, and the ~~electrical power consumption circuit which~~ discharges electrical ~~electric~~ charge stored in the ~~from~~ battery 48, and thereby controllably drops the voltage of the battery ~~is controlled into a~~ to prescribed voltage level.

[0045] The second process step (step B104) of the operation check process B100 is a process for judging ~~determining~~ the efficiency, or a quality, of a charging ~~performance~~ operation. This second process is ~~conducted~~ implemented by a charging-performance-quality-judge function of mode 2 ~~function~~ of the timepiece 1 (~~charging performance quality judge function~~). In more details, More specifically in this second process, the ~~electrical~~ ~~electric~~ timepiece 1 is supplied with a vibration, and thereby ~~the its internal~~ oscillating weight in it is driven to is thereby made to rotate. Therefore ~~Thus~~, electricity is generated in the generator system A, and ~~charging the battery 48 is done~~ charged. Then, the charging-performance-quality-judge function ~~by the of mode 2 function~~ (~~charging performance quality judge function~~), determines if whether or not the battery's voltage reaches a charging completion ~~charge complete~~ voltage level within a prescribed ~~charging period of time~~ is judged, and the result of judgement is displayed ~~conveyed~~ to the user by movement of second hand 61. That is, mode 2 determines if the battery is charged up to a predetermined voltage level within a prescribed time period, and outputs the result.

[0046] The third process (step B105) of the operation check process B100 is a process for poor quality detection by operating the timepiece 1. In more details, in this third process, under at high or low temperatures ~~condition~~, although motor drive circuit E is being able to rotate ~~the~~ stepping motor 10, drive circuit E generates an irregular motor drive pulse, which will result in more electrical ~~higher~~ electric power consumption is generated from the motor drive circuit E. Operation ~~under this kind of~~ at these severe conditions enables to detection of motor characteristic trouble, which is not possible to detectable ~~under when generating a~~

normal motor drive pulse. When the trouble is detected, movement of, for example, the second hand 61 is changed from a normal state to either a different state, and which the state is continued maintained. The user sees that the movement of second hand is different from than in the normal state, and thereby knows that there is a problem with the motor characteristics has some trouble.

[0047] Next, by using with reference to FIGS. 3 to 8, details of each construction part of the timepiece 1 shown in FIG. 1 will be described. FIG. 3 is a block diagram showing detail of the construction of the control unit C, and signal flows between units of from A to G. In FIG. 3, blocks of from 301 to 312 are circuit blocks in the control unit C, and those surrounded by broken-dashed lines are not.

[0048] The charge detecting circuit 301 receives the output voltage of the generator coil 44 as a generation voltage signal SW ($\phi 13$), and, by in accordance with the signal, detects a generation state of the generator system A. And then the circuit 301 outputs the result showing a signal indicating a detection result of the charging state as a charge detect result signal SA. The signal SA which enters into is input to the rectifier circuit 47 in the power supply system B is used as a signal for controlling a rectification operation. The Rectified output of the rectifier circuit 47 is supplied to the battery 48 (the battery unit) 48 as a rectification output signal SB. And a stored voltage signal SC showing the stored voltage (=VKTN) of battery 48 enters is applied to into a raising and lowering circuit 49 and a voltage detecting circuit 302.

[0049] The voltage detecting circuit 302 receives the stored voltage signal SC, a stored voltage raising and lowering result signal SD ($\phi 12 = VSS$), and a voltage detect control signal SX. The stored voltage raising and lowering result signal SD is a signal indicating the output voltage of the raising and lowering circuit 49. The voltage detect control signal SX is output from a timepiece control circuit 303. The voltage detecting circuit 302, when the voltage detect control signal SX is active, compares the signal SC, which indicates the stored voltage VKTN, with predetermined reference comparison voltages of DCHRGV and CHRGV respectively, then outputs a voltage detect result signal SN comprised of bits SN1 and SN2 indicating respective comparison results.

[0050] Incidentally It is to be noted that, other rather than direct comparison between the comparing stored voltage VTKN and with the reference comparison voltages, it is possible to compares, instead of the stored voltage VTKN, the raising and lowering voltage VSS with the reference voltages of DCHRGV and CHRGV, and then and to outputs the voltage detect comparison result as signal SN.

[0051] For example, when the raising and lowering circuit 49 is ~~on a state of raising ratio of~~ operated to provide a raising factor of 2, if it is detected that the absolute value of VSS is 1.25 V ~~is detected~~, outputting the voltage detect result signal SN indicating the absolute value of VTKN of 0.625 V gives an equivalent effect.

[0052] The timepiece control circuit 303 uses the output voltage VSS of the raising and lowering circuit 49 as a power source. The timepiece control circuit 303 receives a first and a second stored electricity unit discharge control signals SO1 and SO2 from a stored electricity unit discharge control circuit 305, a stored electricity unit charge completion control signal SP from a stored electricity unit charging completion judge circuit 306, a motor drive trouble judge signal SQ from a motor drive trouble judge circuit 304, a high-frequency magnetic field detect result signal SK from high-frequency magnetic field detect circuit 307, an alternating current magnetic field detect result signal SL from an alternating current magnetic field detect circuit 308, and a rotation detect result signal SM from a rotation detect circuit 309.

[0053] Then the timepiece control circuit 303 generates the voltage detect control signal SX, and supplies it to the voltage detecting circuit 302.

[0054] ~~And t~~The timepiece control circuit 303 generates a motor driving signals SE, SF, SG, and SH, and supplies them to the motor drive circuit E, and also generates a non-rotation detect measure signal SY, and supplies it to the motor drive trouble judge circuit 304.

[0055] The motor drive signal SE is a pulse signal comprised of a normal driving pulse, a rotation detect pulse, a high frequency magnetic field detect pulse, a magnetic field detect pulse, ~~and an auxiliary pulse~~, and so on. The normal driving pulse is a pulse supplied to the motor drive circuit E for a regular motor drive. The rotation detect pulse is a pulse supplied to the motor drive circuit E when detecting whether ~~or not~~ there is a high-frequency magnetic field. The high frequency magnetic field detect pulse is a pulse supplied to the motor drive circuit E for detecting an external magnetic field. The auxiliary pulse is a pulse that is output when the motor fails to rotate by in response to only the normal driving pulse. This auxiliary pulse, ~~and has bigger higher~~ effective electric power than the normal driving pulse. When the auxiliary pulse is generated, the non-rotation detect measure signal SY is generated.

[0056] The motor driving signal SF is a pulse for controlling the motor driving circuit E when discharging the battery 48.

[0057] The motor driving signal SG is a pulse for controlling the motor unit D when charging ~~the of~~ battery 48 is completed.

[0058] The motor driving signal SH is a pulse for controlling the motor unit D ~~to for other hand movement from other than normal hand movement, and, is output~~ when motor trouble takes place, ~~is output~~.

[0059] When a high-frequency magnetic field detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The high frequency magnetic field detect circuit 307 is a circuit ~~to detecting~~ existence of a high-frequency magnetic field by comparing a voltage SJ of the induced voltage with the pre-determined reference value for alternating current magnetic field detection.

[0060] When a magnetic field detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The alternating current magnetic field detect circuit 308 is a circuit ~~to for detecting~~ existence of an alternating current magnetic field by comparing a voltage SJ of the induced voltage with the pre-determined reference value for alternating current magnetic field detection.

[0061] When a rotation detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The rotation detect circuit 309 is a circuit ~~to for detecting~~ existence of a rotation of the drive motor by comparing a voltage SJ of the induced voltage with the pre-determined reference value for rotation detection.

[0062] ~~Incidentally~~ It is to be noted that, a section in the timepiece control circuit 303 for outputting the motor drive signal SE, the high frequency magnetic field detect circuit 307, the alternating current magnetic field detect circuit 308, and the rotation detect circuit 309 are based on known techniques ~~which have been used for~~ controlling a stepping motor drive. For example, the technique is described in Japanese Patent Application Laid-Open Publication No.10-225191 entitled "eControl dDevice for sStepping mMotor, iIts eControl mMethod, and tTime kKeeping dDevice", and Japanese Patent Publication No. 3-45798 entitled "aAnalog eElectric tTimepiece"-explain the technique, both of which are hereby incorporated by reference.

[0063] An operation check function control circuit 310 receives a first external input signal SR1 and a first external input differential signal SR2. The first external input signal SR1 is a signal output from a first external input unit F, and indicating that a switch (a crown) in the first external input unit F is operated. The

first external input differential signal SR2 is a differentiated signal of the first external input signal SR1. ~~And the~~ The operation check function control circuit 310 outputs an operation check function control signal SS.

[0064] A second external input unit measure circuit 311 receives an operation check function control signal SS and a second external input signal ST. The second external input signal ST is a signal output from a second external input unit G, and indicating that a switch (a crown) in the second external input unit G is operated. ~~And the~~ The second external input unit measure circuit 311 outputs an operation check function mode select signal SU which has two bits of SU1 and SU2.

[0065] The operation check function mode select circuit 312 receives the operation check function mode select signal SU and the operation check function control signal SS. And the operation check function mode select circuit 312 outputs an operation check function mode select result signal SV which has three bits of SV1, SV2, and SV3. The three bits of SV1, SV2, and SV3 of the operation check function mode select result signal SV ~~enters into~~ are input to the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the motor drive trouble judge circuit 304 respectively. A bit SV1 of the operation check function mode select result signal SV is a bit indicating by positive logic that the operation check function is in the mode 1. The bit SV1 ~~has~~ is at a high level when the mode of the operation check function is in the mode 1. A bit SV2 is a bit indicating by positive logic that the operation check function is in the mode 2. The bit SV2 ~~has the~~ is at a high level when the mode of the operation check function is in the mode 2. A bit SV3 is a bit indicating by negative logic that the operation check function is in the mode 3. The bit SV3 ~~has the~~ is at a low level when the mode of the operation check function is in the mode 3.

[0066] Next, referring to FIGs. 4, 5, and 7, ~~the a~~ a description will be ~~given~~ provided with respect to the operation check function control circuit 310, the second external input unit measure circuit 311, the operation check function mode select circuit 312, the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the motor drive trouble judge circuit 304.

[0067] FIG. 4 is a circuit diagram showing the detailed ~~construction of the~~ operation of check function control circuit 310 shown in FIG. 3. The operation check function control circuit 310 comprises two 2-bit counters 401 and 402, a 1-bit counter 403, two D ~~flip-flap~~ flip-flops 404 and 405, an SR latch 406, three double-input ORs 407 to 409, a double-input AND 410, a double-input XNOR (exclusive logic addition of negative logic output) 411, and ~~two double input of positive logic~~

input and negative logic input ANDs 412 and 413 each of which has a positive logic input terminal and a negative logic input terminal.

[0068] An output signal of OR gate 408 is input to In the reset terminal R of the 2-bit counter 401 enters an output signal of the OR 408. A clock signal F1 having a cycle of one second In is input to the clock terminal CLK of the 2-bit counter 401 enters a clock signal F1 having a cycle of one second. The 2-bit counter 401 counts the clock signal F1 when the output signal of the OR 408 has the is at a low level.

[0069] The first external input signal SR1 is input to In the positive logic input terminal of the AND 412 enters the first external input signal SR1. The signal SR1 becomes the is set to a high level when the crown, which is the switch of the first external input unit F, is pulled out by two clicks.

[0070] The first external input differential signal SR2 is input to In the positive logic input of the AND 413 enters the first external input differential signal SR2. The signal SR2 is a differentiated signal of the signal SR1. In more detail, the signal SR2 is generated under a case when the crown in a state of being pulled out by two clicks is pushed back by one click or two, the first external input signal SR1 is reset from a high level turns to the a low level from the high level. The signal SR2 is a single pulse signal having a predetermined pulse width.

[0071] The operation check function mode select circuit 312 output the operation check function mode select result signal SV2, which is applied to In the negative logic input of the ANDs gates 412 and 413 enters the operation check function mode select result signal SV2 output from the operation check function mode select circuit 312. When the signal SV2 has the is at a low level, the ANDs gates 412 and 413 output the first external input signal SR1 and the first external input differential signal SR2 as they are.

[0072] The clock signal F1 having a cycle of one second is input to In the clock terminal CLK of the 1-bit counter 403 enters the clock signal F1 having a cycle of one second. The output of AND gate 412 is input to In the active low reset terminal R having the low active of the 1-bit counter 403 enters the output signal of the AND 412. The 1-bit counter 403 counts pulses in the clock signal F1 when the output signal of the AND gate 412 has the is at a high level.

[0073] The data terminal D of the D flip-flapflip-flop 404 is fixed at the a high level. In tThe reset terminal R having the low active of D flip-flapflip-flop 404 is active low. enters the The output signal of the of AND gate 412 is applied to the reset terminal R of D flip-flop 404. Output XQ of 1-bit counter 403 is applied to In the clock input terminal, CLK, of the D flip-flapflip-flop 404 enters the output signal

of the output terminal XQ of the 1-bit counter 403. Accordingly, ~~under a state that the when the~~ output signal of the AND gate 412 ~~has the is~~ at a high level, when the output signal of the output terminal XQ of the 1-bit counter rises, the D flip-flop ~~D flip-flop~~ 404 responds to a rise at output XQ of 1-bit counter 403 by ~~reads~~ latching in the input signal having high level at its data terminal D ~~which is given to the data terminal D~~ and ~~outputs~~ outputting the same from ~~the its~~ output terminal Q.

[0074] The data terminal D of the D flip-flop ~~flip-flop~~ 405 is fixed at ~~the a~~ high level. ~~In the r~~Reset terminal R having the low active of D flip-flop ~~flip-flop~~ 405 is active low and it receives ~~enters the output signal of the from~~ AND 410. The output from AND gate 412 ~~In is applied to the clock input terminal CLK of the D flip-flop~~ ~~flip-flop~~ 405 ~~enters the output signal of the AND 412~~. Accordingly, when under a state that the output signal of the AND gate 410 has the is high level, when the output signal of the AND 412 rises, the D flip-flop ~~flip-flop~~ 405 will reads the its input high signal having high level which is given to the data at its terminal D and outputs the same from the on output terminal Q in response to a rise at the output of AND gate 412.

[0075] The OR 407 receives the " 2^1 " output Q1 ~~of the from~~ 2-bit counter 401 and ~~the output signal from the output terminal Q of the from~~ D flip-flop 405.

[0076] The output OR gate 407 ~~In the coupled to the set terminal S of the SR latch 406 enters the output signal of the OR 407. Output Q of D flip-flop 404~~ ~~In the is applied to the reset terminal R of the SR latch 406, enters the output signal from the output terminal Q of the D flip-flop 404.~~

[0077] The OR 409 ~~outputs a logical sum the logic OR function of the output signal of the output terminal Q of the SR latch 406 and an the output signal of the AND gate 413.~~

[0078] The output of OR gate 409 ~~In is applied to the clock terminal CLK of the 2-bit counter 402 enters the output signal of the OR 409. The output Q of SR latch 406 is applied to~~ ~~In the reset terminal R of the 2-bit counter 402 enters the output signal of the output terminal Q of the SR latch 406. When the output of SR latch 406 is at a low level, The counter 402, when the output signal of the SR latch 406 has the low level, counts the signal SR2 supplied via the AND gate 413 and OR gate 409. Here, when the output of the OR 407, which is to be a coupled to the set input S of the SR latch 406 has the is at a low level, the output Q of the SR latch 406 becomes the low level by receiving the is reset in response to a high level signal once in the at its reset input R.~~

[0079] The 2-bit counter 402 has a "2⁰" output (i.e. Q0) and a "2¹" output (i.e. Q1). These output terminals are connected to input terminals of the AND gate 410. Accordingly, in a case in which the When output Q of the SR latch 406 has the is at a low level, signal SR2 is permitted to pass through OR gate 409 to 2-bit counter 402. Thus, if the output of SR latch 406 is low, when as and three SR2 three-pulse signals are applied to the enter into the 2-bit counter 402, both the outputs (Q0 and Q1) of the 2-bit counter 402 will go become the high level upon the third pulse of signal SR2 and cause the output signal of the AND gate 410 to becomes the high level.

[0080] The output signal of the AND 410 is output as operation check function control signal SS from the operation check function control circuit 310. The signal SS, when the at a high level, starts the operation check function. And the sSignal SS is also input to the active low reset input terminal R having the low active of the D flip-flop 405, as mentioned above.

[0081] The XNOR 411 outputs a high level, when both of the "2⁰" output Q0 and the "2¹" output Q1 of the counter 402 have the are at a low level or both are at a high level, outputs a signal of high level, and XNOR 411 outputs a low level when both Q0 and Q1 of counter 402 at when the levels of them are different levels, outputs a signal having the low level.

[0082] The OR gate 408 outputs a logical OR function sum of the output signal of the from XNOR 411 and the output signal of the from AND gate 413. The output of OR gate 408 is applied to the reset terminal R of the 2-bit counter 401.

[0083] FIG. 6A, 6B, and 7 are timing charts diagrams showing of a function of the operation check function control circuit 310 explained above.

[0084] First, the state when the operation check function mode is not at the other than mode 2, the operation check function mode select result signal SV2 has the is at a low level, and the operation check function control signal SS which is at a has the low level will be described.

[0085] In this case, the operation check function control circuit 310 receives the signal SR1 having the which is at a high level for more than 1 or 2 seconds (period T1) of time, and from the time the signal SR1 turns to the is set to a low level, when the signal SR1 falls twice continuously from the a high level to the a low level at an interval T2, namely of less than an average of 1.5 second average, raises sets the operation check function control signal SS to the a high level.

[0086] This operation is described by with reference to FIGs. 6A and 6B.

[0087] At the initial state, the output signal Q of the SR latch 406 ~~has the~~ is at high level, both the output signals Q0 and Q1 of the counter 402 ~~have the~~ are at a low level, the signal SS ~~has the~~ is at a low level, the output signal of the ~~doubled~~ dual-input XNOR gate 411 ~~has the~~ is at a high level, both the output signals Q0 and Q1 of the counter 401 ~~have the~~ are at a low level, and the output signal Q of the D flip-flapflip-flop 405 ~~has the~~ is at a low level.

[0088] ~~Here, when~~ When the crown is pulled out to the second click, the signal SR1 ~~becomes the~~ is set to a high level. As a result, the output signal of the AND gate 412 ~~becomes the~~ is set to a high level, and the reset of the counter 403 and the D flip-flapflip-flop 404 are cancelled.

[0089] After this cancellation, when the first clock pulse F1 is generated, ~~by this clock pulse F1 counting of the counter 403 is carried out~~ counts this clock pulse F1, and the ~~causing its~~ output signal XQ of the counter 403 ~~to falls~~ (the arrow a1).

[0090] ~~Then, w~~ When the second clock pulse F1 is generated, ~~counting of the counter 403 is carried out further~~ counts this pulse, and the ~~its~~ output signal XQ of the counter 403 ~~rises~~ (the arrow a1). As a result, the ~~a~~ high level signal is input to the ~~the~~ clock in put of D flip-flop 404, and the output signal Q of the D flip-flop 404 rises ~~(the arrow a3).~~ Then ~~due to by this rise of in the output signal Q of the D flip-flop 404,~~ the SR latch 406 is reset, and the output signal Q of the SR latch 406 ~~becomes the~~ is reset to a low level ~~(the arrow a4).~~ And ~~b~~ Because the output of SR latch 406 ~~becomes the~~ is reset to a low level, the reset state of the counter 402 is cancelled, and the state of the counter 402 enters a state where it can actively count ~~becomes practicable to counting.~~

[0091] Next, when the crown is pushed back from the second click to the first click or to the normal position, the signal SR1 falls to ~~the~~ a low level. As a result, the counter 403 and the D flip-flapflip-flop 404 are reset, and the output signal Q of the D flip-flapflip-flop 404 ~~becomes the~~ is set to a low level.

[0092] On the other hand, when the pulse signal SR2 is generated by the fall of the signal SR1, the pulse signal SR2 starts the counter 402 ~~to conduct the counting up,~~ and the output signal Q0 of the counter 402 rises to the ~~a~~ high level ~~(the arrow a6).~~ As a result, the output signal of the XNOR gate 411 ~~becomes the~~ is set to a low level ~~(the arrow a7).~~ Thus the reset state of the counter 401 is cancelled, and the state of the counter 401 ~~becomes practicable to counting~~ is set to an active counting state, i.e. a state where it can actively count.

[0093] As described above, after the crown is pulled out to the second click, when two clock pulses F1 are generated, the state of the counter 402 is set to its active

~~counting state becomes practicable to counting.~~ Then when the crown is pushed back to the first click or to the normal position, the ~~state of the counter 401 becomes practicable to~~ is set to its active counting state.

[0094] In the above description, in the period from the rise to the fall of the signal SR1, two clock pulses F1 are generated. However, a case where three or more clock pulses F1 are generated ~~falls into the same~~ has a similar result.

[0095] Afterward, if the crown is ~~not handled adjusted~~, the signal SR1 does not change, and the clock pulse F1 is generated, ~~then counting up is carried out at the counter 401 will continue to count,~~ and ~~the its~~ output signal Q0 of the counter 401 becomes the will be set to a high level (the arrow a8). Then ~~when the if another~~ clock pulse F1 is generated ~~further, counting up is carried out at the it will be counted by counter 401, and the resulting in~~ output signal Q0 of the counter 401 ~~becomes the being set to a low level, and the output signal Q1 of the counter 401 becomes the being set to a high level (the arrow a9).~~

[0096] Then because the output signal Q1 of the counter 401 ~~becomes the is set to a high level,~~ the output signal Q of the SR latch 406 ~~become the is set to a high level (the arrow a10).~~ As a result, ~~the counter 402 is reset, the output signal Q0 of the counter 402 becomes the is set to a low level (the arrow a11), and the output signal of the XNOR gate 411 becomes the is set to a high level (the arrow a12).~~

[0097] Then because the output signal of the XNOR gate 411 ~~becomes the is set to a high level,~~ the counter 401 is reset ~~(the arrow a13), and afterward the counter will not count even if the clock pulse F1 is given generated.~~

[0098] As described, even when ~~the counters 401 and 402 become practicable to counting are set to their active counting state by~~ pulling the crown to the second click and pushing it back to the original position, if the crown is ~~not handled adjusted~~, the operation check function control circuit 310 returns to the state before ~~handling adjusting the crown, and the signal SS does not change.~~

[0099] ~~Compared to this~~ In comparison, when the counters 401 and 402 ~~become practicable to counting are set to their active counting state by~~ pulling the crown to the second click, if a prescribed crown ~~handling is done~~ adjusting is carried out, the signal SS is raised by the operation check function control circuit 310.

[0100] ~~From here, FIG. 6B is~~ will now be described. The ~~Operations with the relating to arrows a1 to a7 are the same as in those described with reference to FIG. 6A.~~

[0101] As described in FIG. 6A, after the crown is pulled out to the second click, when two clock pulses F1 are generated, ~~the state of the counter 402 is placed in its~~

~~active counting state becomes practicable to counting.~~ Then when the crown is pushed back to the first click or to the normal position, ~~the state of the counter 401 becomes practicable to~~ is placed in its active counting state (the arrows a1 to a7).

[0102] ~~Afterward, if the clock pulse F1 is generated, counting up at the counter 401 is carried out by this clock pulse F1~~ is counted by counter 401, and the numbercount value of count of the counter 401 becomes "1" (the arrow a11). ~~But However, before the next clock pulse F1 is generated, if the pulse SR2 is generated by the handling of adjusting the crown before the next clock pulse F1 is generated, the counter 401 is will be reset, and the its count value number of count of the counter 401 will becomes "0" (the arrow a12). And counting up at the counter 402 is carried out by the counts pulse SR2, and the numbercount value of count of the counter 402 will becomes "2" (the arrow a13).~~

[0103] ~~Then wWhen the clock pulse F1 is again generated, it will be counted counting up at the by counter 401, whose is carried out by this clock pulse F1, and the numbercount value of count of the counter 401 will becomes "1" (the arrow a14). But before the next clock pulse F1 is generated, if the pulse SR2 is generated by the handling of adjusting the crown before the next clock pulse F1 is generated, the counter 401 is will be reset, and the number of count of the counter 401 its count value will becomes "0" (the arrow a15). Also, And counting up at the counter 402 is carried out by the will count pulse SR2, and the its numbercount value of count of the counter 402 will becomes "3" (the arrow a13). As a result, the signal SS becomes will be set to a the high level (the arrow a17). By this, the operation mode of the electrical electric timepiece becomes the is set to mode 1, - And and the reset state at the of D flip flap flip-flop 405, the reset is cancelled.~~

[0104] When the numbercount value of count of the counter 402 becomes "3", the output signal of the XNOR gate 411 ~~becomes the is set to a high level (the arrow a18).~~ As a result, the counter 401 is reset. Therefore, afterward if the further generations of clock pulse F1 is generated, counting operation at the will not be counted by counter 401 until it is set active again will not be carried out.

[0105] As described above and shown in Fig. 6B, three conditions are required to set signal SS to a high level. Firstly, if in during the a period from the rise to the fall of the signal SR1, two or more clock pulses F1 are generated, after Secondly, another the rise and fall pulse of the signal SR1 is generated followed by another F1 pulse. , and Thirdly before the generation of the a subsequent clock pulse F1, the another rise and fall pulse of the signal SR1 (the pulse SR2) takes place, and before the generation of the next clock pulse F1, the fall of the signal SR1 (the pulse SR2) takes place, the by which signal SS is switched set to the a high level. Here,

~~because the cycle period of the clock pulse F1 is one second, the time period from the rise of the signal SR1 to the fall of the signal SR1, or the time period T1 in FIG. 7, will be fully satisfied complete within two seconds.~~

[0106] The time period from the first fall to the second fall of the signal SR1, or the time period from the third fall to the fourth fall of the signal SR1, or the time period T2 in FIG. 7, will be ~~satisfied~~ completed within 1.5 seconds.

[0107] Next, the state when the operation check function mode select result signal SV2 ~~has the~~ is at a low level, and the operation check function control signal SS ~~has the~~ is at a high level will be described.

[0108] In this case, when the signal SR1 rises, the mode 1 is cancelled. This operation is described in reference to in FIG. 6B.

[0109] First, when the signal SR1 rises, ~~the a~~ a high level signal is input to ~~the~~ the D flip-flop 405, and the output signal Q of ~~the~~ the D flip-flop 405 becomes ~~the~~ is set to a high level (~~the~~ the arrow a21). As a result, ~~the~~ the SR latch 406 is set (~~the~~ the arrow a22), output a high signal at its output and thereby this the placing counter 402 is in a reset state. As a result, ~~and the numbercount value of count of the counter 102 becomes "0" (the arrow a23).~~ Then because ~~the~~ the counter 402 is in its reset state, the signal SS ~~becomes the~~ is set to a low level, and ~~the~~ the mode 1 is cancelled (~~the~~ the arrow a24).

[0110] ~~And because the~~ Since signal SS ~~becomes the~~ is at a low level, ~~the~~ the D flip-flop 405 is reset (~~the~~ the arrow a25). The subsequent operation after this differs depending depends on what kind of the wave form is formed by the of signal SR1, but and is described already above.

[0111] Next, reference to FIGS. 4 and 7, the state when the operation check function mode is ~~at the~~ to mode 2, and the operation check function mode select result signal SV2 ~~becomes the~~ is at a high level will be described.

[0112] In this case, even if the signals SR1 and SR2 changes, the operation check function control signal SS ~~does not turn to the~~ is not set to a low level.

[0113] Next, ~~referring with reference to~~ FIG. 5 the a detailed description will be given with respect to the second external input unit measure circuit 311, the operation check function mode select circuit 312, the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the motor drive trouble judge circuit 304.

[0114] The second external input unit measure circuit 311 comprises an inverter 501, a ~~doubled~~ dual-input AND gate 502, and a 2-bit counter 503. The inverter 501

receives the operation check function control signal SS. The AND gate 502 receives the second external input signal ST and the operation check function mode select result signal SV3. Here, the second external input signal ST is a signal which becomes the that is set to a high level when the switch (indicator switch) of the second external input unit G is pushed back. The output of inverter 501 is applied to the reset input of As for the 2-bit counter 503, in the reset terminal R enters an output signal of the inverter 501, and the output of AND gate 502 is applied to in the clock input of the 2-bit counter 503 terminal enters an output signal of the AND 502. Therefore, when the both signals SS has the high level and the signal and SV3 has the are at a high level, the 2-bit counter 503 is placed in its active counting state and counts the number of pulses (the number how many times the indicator switch is pushed back) input as the of second external input signal ST (i.e. the number of many times the indicator switch is pushed back). Here, the sSignal SV3 is a signal generated by decoding the output of the counter 503, and it is set becomes the to a low level when the numbercount value of count of the counter 503 is 2. Therefore, the counter 503 counts the value from 0 to 2.

[0115] In an explanatory example of FIG. 7, after the operation check function control signal SS becomes the is set to a high level at the time t1, the bits bit signals SU1 (Q0) and SU2 at respective outputs (Q0 and Q1) of the counter 503 has been the are set at low levels. At the time t2, as the signal ST, a pulse signal is input to the counter 503, the bit SU1 of the counter 503 becomes the is set to a high level and the bit SU2 of the counter 503 becomes the is set to a low level. At the time t3, as the signal ST, another pulse signal is input to the counter 503, the bit SU1 of the counter 503 becomes the low level and the bit SU2 of the counter 503 becomes the are set to a high level. When the bit SU1 becomes the is set to a low level and the bit SU2 becomes the is set to a high level, the signal SV3 becomes is set to a low level. In this case, for example, even if, as the signal ST, a pulse signal is input to the counter 503, the output value of the counter 503 does not change. The counter 503 is reset when the signal SS becomes the is set to a low level (at the time t5).

[0116] The operation check function mode select circuit 312 in FIG. 5 comprises an 3-input AND gate 504 (having three input of two negative logic active low inputs and one positive logic active high input), an 3-input NAND 506 (having three input of one negative logic active low inputs and two positive logic active high inputs). Bits SU1 and SU2 of counter 503 are applied to the In two negative logic active low inputs of the AND gate 504 enter bits SU1 and SU2 of the counter 503, and the operation check function control signal SS in one positive logic is applied to the active high input of the AND gate 504 enters the operation check function control signal SS. As shown in FIG. 7, when both the bits SU1 and SU2 of the counter 503

~~has the~~ are at a low level and the operation check function control signal SS ~~has the~~ is at a high level, the AND gate 504 outputs the operation check function mode select result signal SV1 ~~with the~~ at a high level indicating the operation check function is at the mode 1. In the same way, when the bit SU2 of the counter 503 ~~has the~~ is at a low level and both the bit SU1 and the operation check function control signal SS ~~has the~~ are at a high level, the AND gate 505 outputs the operation check function mode select result signal SV2 ~~with the~~ at a high level indicating the operation check function is at the mode 2. When the bit SU1 of the counter 503 ~~has the~~ is at a low level and both the bit SU2 and the operation check function control signal SS ~~has the~~ are at a high level, the NAND gate 506 outputs the operation check function mode select result signal SV3 ~~with the~~ at a high level indicating the operation check function is at the mode 3.

[0117] The stored electricity unit discharge control circuit 305 comprises an inverter 507, a D flip-flop 508, a ~~doubled~~dual-input AND gate 509, and a ~~triple~~3-input AND gate 510.

[0118] ~~In the inverter 507 enters a~~ Voltage detect result signal SN1 is input to inverter 507. ~~The~~ Signal SN1 is one of comes from one the bit lines of the voltage detect result signal SN. The signal SN1 ~~becomes the~~ is set to a high level, when the ~~detection is made~~ it is detected that the signal SC of indicating the stored voltage VKTN becomes lower than the discharge reference voltage DCHRGV (further from the ground VDD, that is, not reaching the predetermined discharge voltage). ~~Incidentally~~ It is to be noted, instead of the above configuration, it is also possible to ~~make set the~~ signal SN1 the to a high level, when the ~~detection is made~~ it is detected that the stored voltage raising and lowering result signal SD which indicates the output voltage VSS of the raising and lowering circuit 49 becomes lower than the discharge reference voltage DCHRGV.

[0119] ~~As for~~ Regarding the D flip-flop 508, the operation check function mode select result signal SV1 is input to ~~in the reset terminal R having the low active~~ enters the operation check function mode select result signal SV1, and the output signal of inverter 507 is input to ~~in the clock terminal CLK enters the output signal of the inverter 507,~~ and the data input terminal D is fixed at the ~~a~~ high level.

[0120] The AND gate 509 ~~outputs a logical product~~ outputs the logic AND function of the output signals of the output terminal XQ of the D flip-flop 508 and the operation check function mode select result signal SV1 as the first stored electricity unit discharge control signals SO1.

[0121] The AND gate 510 ~~comprises a negative logic~~ has an active low input and two positive logic active high inputs. ~~Into the negative logic input enters~~ The first

stored electricity unit discharge control signals SO1 from the AND gate 509 is applied to the active low input of AND gate 510. Into the positive logic inputs enters ~~t~~The operation check function mode select result signal SV1 and the discharge reference voltage DCHRGV are applied to the active high inputs of AND gate 510. The AND gate 510 outputs a the logical AND function product of the its input signals as the second stored electricity unit discharge control signals SO2.

[0122] As shown in FIG. 7, the stored electricity unit discharge control circuit 305 makes-sets the first stored electricity unit discharge control signals SO1 the-to a high level when operation check function mode shifts to the mode 1 under the ~~condition~~ when the battery unit (battery 48) is being charged.

[0123] In a period P1 when the first stored electricity unit discharge control signals SO1 has the-are at a high level, the timepiece control circuit 303 in FIG. 3 outputs as the motor driving signal SF a drive clock signal which short-circuits the motor drive circuit E or fast-forwards the motor unit D. Accordingly, in-during the period P1 in FIG. 7, the electricalelectric charge in the battery unit 48 is released to be-as a drive current on a scale much larger-higher than that at-of the normal drive state in-of the motor unit D.

[0124] As discharging continues, when the stored electricity voltage VTKN or the stored electricity voltage raising and lowering result voltage VSS becomes higher than the discharge reference voltage DCHRGV (that is, nearer to the ground VDD, meaning the discharging-advanced operation is progressing), the signal SN1 becomes the-is set to a low level synchronous to-with the voltage detect control signal SX, which is repeatedly becomes the-set to a low level in a predetermined cycle. When the signal SN1 becomes the-set to a low level, the stored electricity unit discharge control circuit 305 makes-sets the first stored electricity unit discharge control signals SO1 the-to a low level. By thisThus, the period P1 shifts to a period P2.

[0125] When the first stored electricity unit discharge control signals SO1 becomes the-are set to a low level, the timepiece control circuit 303 in FIG. 3 outputs for example a signal to stop the motor drive unit E. Accordingly, in the-during period P2, discharging of the battery unit 48 is stopped, and the stored electricity voltage VTKN or the stored electricity voltage raising and lowering result voltage VSS becomes to the-is gradually brought to a low voltage gradually by the voltage recovery effect. Then when the voltage VTKN or VSS becomes lower than the discharge reference voltage DCHRGV, the signal SN1 becomes the-is set to a high level synchronous to-with the voltage detect control signal SX, and the second stored

electricity unit discharge control signals SO2 ~~becomes the~~ is set to a low level. By this, the period P2 shifts to a period P3.

[0126] ~~Incidentally~~ It is to be noted that, although not shown in FIG. 3, the operation check function control signal SS and the operation check function mode select result signal SV and the like are supplied to the timepiece control circuit 303. The timepiece control circuit 303 is capable of distinguishing the shifting state between each mode by these control signals.

[0127] When the second stored electricity unit discharge control signals SO2 ~~becomes the~~ are set to a high level, the timepiece control circuit 303 in FIG. 3 outputs, as the motor driving signal SF, a drive clock signal to fast-forward the motor unit D. Here, ~~as fast-forwarding modes, include there are a~~ 32 hertz fast-forwarding, an intermittent drive of 32 hertz drive and stop, ~~and 8 hertz fast-forwarding, and the like. In a period~~ During P3, the ~~electrical~~ electric charge of the battery unit 48 is re-released to be a drive current on a scale of smaller than that of the period P1 and larger than that at the normal drive state.

[0128] Then, when the voltage VTKN or VSS again becomes higher than the discharge reference voltage DCHRGV ~~again~~, the signal SN1 ~~becomes the~~ is set to a low level at the a timing synchronous to ~~with~~ the voltage detect control signal SX, and the second stored electricity unit discharge control signals SO2 ~~becomes the~~ are set to a low level. ~~By this~~ Thus, the period P3 shifts to a period P4.

[0129] When the second stored electricity unit discharge control signals SO2 ~~has the~~ are at a low level, the timepiece control circuit 303 stops the motor drive circuit E. Therefore, ~~in the~~ during period P4, discharging of the battery unit 48 is stopped, and the stored electricity voltage VTKN of the battery unit 48 or the stored electricity voltage raising and lowering result voltage VSS is again gradually brought becomes to the low voltage gradually by the voltage recovery effect again. Until the stored voltage becomes stable or the shift to the mode 2 is carried out by the external input, the ~~states~~ operations performed during of the periods P3 and P4 ~~is are~~ repeated and the discharging is carried out. However, in the example of ~~But~~ FIG. 7, ~~shows an example that after one repeat operation the~~ a shift to the mode 2 is conducted.

[0130] Next, the stored electricity unit charging completion judge circuit 306 shown in FIG. 5 will be described. The circuit 306 is composed of an AND gate 511, and outputs as the stored electricity unit charge completion control signal SP a logical ~~product~~ AND function of the voltage detect result signal SN2 and the operation check function mode select result signal SV2. Here, the signal SN2 is a signal output from the voltage detecting circuit 302 ~~and becomes the~~ and is set to a

high level when the stored electricity voltage VTKN or the stored voltage raising and lowering result signal SD (VSS) becomes lower than the charge reference voltage CHRGV (that is, further from the ground VDD, or reaching the predetermined discharge voltage). The signal SV2 is a signal output from the operation check function mode select circuit 312 and ~~becomes the~~ is set to a high level when the mode is 2. Accordingly, the signal SP becomes ~~the~~ is set to a high level when the operation check function is at mode 2 and the stored electricity unit 48 is charged until ~~the~~ it reaches charge reference voltage CHRGV.

[0131] In ~~the~~ mode 2 in the timing chart of FIG. 7, a vibration is given to the timepiece from outside, and electricity is generated in the generator system A. Therefore ~~the~~ charging to of the battery unit 48 is conducted, and the stored electricity voltage VTKN ~~is going goes~~ down (period P5). During this time, the timepiece control circuit 303 supplies for example a prefixed pulse signal to the motor ~~dive~~ drive circuit E, and ~~controls causes~~ the motor unit D to the perform normal hand movement (one-second interval movement).

[0132] Charging continues, and when the stored electricity voltage VTKN or the stored ~~voltage-raising and lowering result~~ voltage signal SD (VSS) becomes lower than the charge reference voltage CHRGV, the signal SN2 ~~becomes the~~ is set to a high level synchronous ~~to with~~ the voltage detect control signal SX. ~~And~~ Additionally, the stored electricity unit charge completion control signal SP ~~becomes the~~ is set to a high level. ~~By this~~ Thus, the period P5 shifts to a period P6.

[0133] When the stored electricity unit charge completion control signal SP ~~becomes the~~ is set to a high level and the ~~stage operation~~ operation enters into the period P6, the timepiece control circuit 303 supplies, for example, the motor driving signal SG to the motor dive circuit E, and controls the hand movement state of the motor unit D to for example two-second interval movement which is different from the normal hand movement (in this case, one-second interval movement). By this change of the hand movement ~~state~~ operation, the notification of the completion of the charging is ~~made~~ provided. ~~Incidentally~~ It is to be noted that, in the period P6, if the charging voltage increases (that is, discharging is conducted), charging is conducted in the same way as ~~the~~ in period P5. Accordingly, in ~~practical~~ practice, the periods P5 and P6 ~~is are~~ repeated, and the charging voltage becomes stable.

[0134] Next, the motor drive trouble judge circuit 304 shown in FIG.5 will be described. ~~The~~ Circuit 304 comprises ~~doubled~~ dual-input AND gates 512 and 513, (both having a positive logic ~~one~~ active-high input and a negative logic ~~active-low~~ active-low input), a triple-input OR gate 514, a ~~doubled~~ dual-input OR gate 515, and a 3-bit counter 516.

[0135] ~~The AND gate 512 receives the non-rotation detect measure signal SY as a positive logic at its active-high input terminal, and the high-frequency magnetic field detect result signal SK or the alternating current magnetic field detect result signal SL as a negative logic at its active-low input terminal.~~ Here, the signal SY is a signal generated when the non-rotation in the motor unit D is detected. The signals SK and SL ~~becomes the~~ are set at high levels when a magnetic field is detected.

[0136] ~~The AND gate 512 receives the rotation detect result signal SM as at its active-low positive logic input terminal, and receives an output bit Q2 of the counter 516 as a negative logic at its active-low input terminal.~~ Here, the signal SM ~~becomes the~~ is set to a high level when the non-rotation in the motor unit D is detected. The output bit Q2 of the counter 516 ~~becomes the~~ is set to a high level when the counter number of the counter 516 becomes 4 or more.

[0137] ~~The OR gate 514 receives the output signal of the AND gate 512, the operation check function mode select result signal SV3, and the output bit Q2 of the counter 512.~~

[0138] ~~The OR gate 515 receives the output signal of the AND gate 513 and the operation check function mode select result signal SV3.~~

[0139] The operation of the motor drive trouble judge circuit 304 configured as explained above will be described by reference to FIG. 7 as follows.

[0140] In FIG. 7, ~~at the~~ in mode 2, when the indicator switch is pushed on, operation shifts to the mode 3 is carried out (the period P6 to period P7). In this mode-4 3, the operation check function mode select result signal SV3 ~~becomes the~~ is set to an active level (low level), and the reset state of the counter 516 of the motor drive trouble judge circuit 304 is cancelled.

[0141] ~~At the~~ In mode 3, the quality verification of the operation state under high and low temperatures ~~condition~~ is carried out. ~~The~~ Quality verification is carried out as follows.

[0142] First, the timepiece control circuit 303 in FIG. 3 supplies the motor drive signal SE to the motor drive circuit E, and conducts a normal control of the motor unit D (one-second interval movement, rotation detect, drive by auxiliary pulse under a certain condition, and the like).

[0143] Here, this supply of the motor drive signal SE ~~rotates~~ causes the motor to rotate. And when the rotation is detected, the rotation detect result signal SM is output from the rotation detect circuit 309, and thus the counter 516 is reset.

[0144] On the other hand, if the motor does not rotate ~~with the supply of the~~ when signal SE is supplied, pulse signals including the auxiliary pulse having bigger effective electric ~~more~~ power than the normal driving pulse are automatically supplied to the motor drive unit D from the timepiece control circuit 303, and at the same time the timepiece control circuit 303 outputs the non-rotation detect measure signal SY.

[0145] ~~The~~ Counter 516 counts the number of generation ~~times~~ of the signal SY is generated.

[0146] When the non-rotation detect measure signal SY ~~enters into the~~ is applied to counter 516 four times successively while ~~under a condition of no detection of no~~ rotation is detected, the output bit Q2 of the counter 516 ~~becomes the~~ is set to a high level, and the motor drive trouble judge signal SQ indicating that the motor has a problem is output.

[0147] The timepiece control circuit 303, when the motor drive trouble judge signal SQ ~~becomes the~~ is at a high level, supplies to the motor drive circuit E, for example, the motor drive signal SH for ~~controlling~~ causing the motor unit D to implement two-second-interval hand movement which is different from the normal hand movement of one-second-interval hand movement.

[0148] On the other hand, when the motor drive trouble judge signal SQ ~~becomes the~~ is set to a high level, the counter 516 no longer receives a reset signal and a clock signal. Therefore, the counter 516 stops counting. The signal SQ maintains ~~the~~ a high level until the mode 3 is cancelled and the operation check function mode select result signal SV3 ~~becomes the~~ is set to a high level.

[0149] ~~Namely~~ Specifically, even after the quality verification operation ~~under at~~ high and low temperatures ends, and the temperature becomes normal temperature, as long as the mode 3 is maintained, drive signals causing a having different hand movement state different from the normal hand movement is supplied to the motor unit D.

[0150] Accordingly, after the quality verification operation, notification of the motor drive trouble that occurred during the quality verification operation continues to be made.

[0151] Next, the motor driving signal SF for discharging the battery unit will be described by reference to FIG. 8.

[0152] FIG. 8 is a block diagram showing the timepiece control circuit 303 shown in FIG. 1, the motor drive circuit E and the motor unit D. The motor drive circuit E comprises switches 701 to 705 and 707, and rotation detect use elements 706 and

708. In the example shown in FIG. 8, switches 701, 703, 705, and 707 are P-channel MOS (metal oxide semiconductor) transistors, and switches 702 and 704 are N-channel MOS transistors.

[0153] Four switches 701 to 704 form a bridge circuit which drives the stator winding of the motor unit D by use of a potential difference between VDD and VSS as source voltage.

[0154] Rotation detect use elements 706 and 708 are elements to place restrictions on current flowing through the motor unit D, and are comprised of resistors and the like.

[0155] Switch 705 and rotation detect use element 706 are connected in series between one terminal of the motor coil of the motor unit D and the power source line VDD. Switch 707 and rotation detect use element 708 are connected in series between the other terminal of the motor coil of the motor unit D and the power source line VDD

[0156] ~~By the above configuration, in order to~~ To make cause short-circuit current to flow in the motor drive circuit E (for the purpose of discharging the battery unit 48) ~~using the above configuration, by turning the switches 701 and 704 are turned on, it is possible to make the cause short-circuit current O1 to flow in accord with the load of the motor unit D. By turning on the switches 701-703 and 702-704 on, it is also possible to make cause the short-circuit current O2 to flow in accord with the load of the motor unit D. And by making one of short-circuit currents O1 or O2 flow constantly, or by making short-circuit currents O1 and O2 flow by turns at a predetermined fast-forwarding cycle, it is possible to control the short-circuit current.~~

[0157] When required to generate a comparatively small discharge current, it is possible to ~~make establish~~ discharge current flow ~~to the~~ through motor unit D via ~~the rotation detect use elements 706 or 708.~~

[0158] Next, one example of the operation check method of the electronic timepiece explained above will be described by reference to FIG. 9A, 9B, 9C, and 10. FIGs. 9A, 9B, and 9C ~~cooperate to collectively~~ form a flowchart showing flow of operation check process of the electronic timepiece. The flowchart shows the check procedure of processes B101, B104, and B105, which comprise the operation check process B100 shown in the FIG. 2. FIG. 10 shows a specification of the operation check process in FIGs. 9A, 9B, and 9C.

[0159] With Reference to FIGs. 9A, 9B, and 9C, when the timepiece is under in the normal operation drive state (in step 801), and is shifted to mode 1 by specific

operation of the crown in step 802 (i.e. operation for commanding to a shift to the mode 1 is commanded, as shown in FIG. 10, that is to by pulling out the crown by two clicks and pushing it back for a predetermined time period), is done (step 802). As a result, the mode 1 (battery discharge mode) starts. Here, discharging by In mode 1, the drive is discharged by using, for example, a fast-forwarding pulse with of 32 hertz (step 803). By Due to this discharging, when the absolute value of the stored voltage VTKN declines falls below a prefixed predetermined voltage (in FIG. 10, i.e. 1.25V in Fig. 10), the drive in the motor unit D is stoppeds (step 804). In practical practice, the fast-forwarding drive discharging operation in step 803 has two steps: of the first being the a continuous fast-forwarding discharging; and the second being a discharging by repeateding stopping and starting of the fast-forwarding discharge and stoppage by turn at a at two second cycle intervals. And when If the voltage of the battery 48 returns drifts upward, the steps 803 and 804 are carried out again and then repeatedly until the voltage will not return no longer drifts. It will take for example several tens of hours discharging until the discharged state becomes stable at the state of the step 804. Incidentally It is to be noted that, the time period necessary to discharge differs depending on the type of battery, as shown in FIG. 10, but several tens of hours is adequate. Therefore after discharging for a predetermined time period of several tens of hours, by checking the hand movement state, it is possible to judge-determine whether or not the discharging operation is completed. In this example, as shown in FIG. 10, when repeatedly fast-forwarding and stoppage-stopping is occurring, it is possible to judge determine that the discharging operation is completed, and when continuously fast-forwarding is occurring, it is possible to judge-determine that the discharging operation is not completed.

[0160] After completion of the discharge, when the operator handles the indicator switch once (step 805), the mode shifts to the mode 2 (charging mode). In the mode 2, the motor unit D is driven (step 806) in-using the normal hand movement method (one-second interval movement). During this period, by giving-applying vibration, electricity is generated in the generator system A, and the battery 48 is charged (step 807). In-here this step, charging for from several tens of minutes to several hours is carried out, and when the absolute value of the stored voltage VTKN becomes equal to or larger than the-a predetermined voltage (in FIG. 10, 1.33 V), the normal hand movement state shifts to the two-second interval movement state (step 808). Therefore, after the predetermined time period, if the normal hand movement state is maintained, it is possible to judge-determine that the charging function has a problem (step 809). In-here this step, before the operation check of the mode 3, time adjusting is carried out (step 810). Time adjusting is done

accomplished by, for example, pulling out the crown by two clicks and turning the crown. In the present embodiment, when the mode is at the mode 1 or 3, if the crown is operated, the operation check function is released. But, when the mode is at the mode 2, if the crown is operated ~~for to~~ adjusting time, the mode does not shift to another mode.

[0161] Next, when the operator handles the indicator switch once (step 811), the mode shifts to the mode 3 (operation mode). In the mode 3, the motor unit D is driven (step 812) ~~in-using~~ the normal hand movement. Then in the electronic timepiece, self-verification of the drive malfunction during operation is carried out by use of the auxiliary pulse (step 813). ~~In here this step,~~ when the successive pulse drive does not require the use of ~~by using more than a predetermined number of~~ auxiliary pulses ~~is not carried out during operation,~~ the electronic timepiece judges determines itself as to be normal and leaves the hand movement state in the one-second-interval movement (step 814). ~~By this~~ Thus, the operator can judge determine that the electronic timepiece is in good quality. On the other hand, when the successive pulse drive requires the use of ~~by using more than a predetermined number of~~ auxiliary pulses ~~is carried out during operation,~~ the electronic timepiece judges determines itself as to be bad and ~~makes places~~ the hand movement state in the two-second-interval movement (step 815). ~~By this~~ Thus, the operator can judge determine that the electronic timepiece is ~~in bad quality~~.

[0162] Next, when the operator performs a two-click crown pull-out (step 816), the mode 3 is cancelled, and ~~the normal operation state is recovered-restarted~~ (step 817).

[0163] ~~Incidentally~~ It is to be noted that, ~~at the in~~ step 814, when the indicator handling is ~~carried out-executed~~ twice (step 818), the movement ~~becomes-is placed in the one-second-interval movement operation~~ (step 819). In this case, even if the charging is carried out next (step 820), the one-second hand movement continues (step 821) irrespective of the charging state. And ~~at the in~~ step 804, when the indicator handling is carried out three ~~times or more~~ times (step 822), the indicator for indicating the charging state is put into operation (step 823). ~~And a~~ Also, ~~at the in~~ step 810, it is conceivable that indicator handling is carried out twice or more times (step 824), or the operation state becomes that of ~~the step 821 or 823~~. In these cases, when the crown is next ~~handled-once next time~~ (step 825), the operation returns to the normal drive state of ~~the step 801~~. By these check procedures, even if the operator makes a mistake in inputting an operation with the indicator, it is impossible to ~~happen mis-judgement of the~~ identify a poor quality product as a good quality one. For example, ~~at the in~~ step 804, ~~the normally check~~

~~flow is first on the indicator is handled once then shifting to shift to the mode 2.~~
 However, it can happen that the operator ~~performs~~ handles the indicator handling
 twice by mistake. In this case, one-second interval movement takes place. ~~And~~
~~and the operator cannot tell whether that the movement is of the that of step 806 or~~
~~step 819. But However,~~ since the operator thinks that the indicator handling ~~is was~~
 performed once, the operator thinks the mode is ~~at the mode 2~~ and conducts
 charging. In this case, charging ~~at the in step 820 follows is executed followed by~~
~~and then one-second interval movement at the in step 821 follows.~~ ~~And Since the~~
~~operator mistakes thinks the step 809 for step 821 as the step 809, and the operator~~
~~determines judges that the electronic timepiece to be in poor condition is bad~~ (in
 reality, since at the mode 1 the indicator is handled twice, the mode ~~is was~~ shifted
 to ~~the mode 3, and not to mode 2~~). As ~~described explained~~ here, there are ~~cases~~
~~circumstances when that the check flow shifts to the step 825 due to mis-judgement~~
~~of the a good quality product being misjudged as a poor quality one.~~ But it is
 impossible to ~~mis-judge misjudge the a poor quality product as a good quality one.~~
~~And Furthermore, the a mis-judged good timepiece as that is misjudged as bad poor~~
~~quality is will~~ undoubtedly ~~re-judged~~ as good when the check routine is redone
repeated starting from the step 825. ~~And Additionally at the step 804, when if the~~
~~indicator handling is handled is performed three times or more, that is as in the~~
~~above case when the operator performs handled the indicator handling three two~~
~~times or more by mistake, the third indicator handling of the indicator is signals, for~~
~~example, an operation for starting the displaying of the charging amount indicator.~~
~~Since In in this check operation flow, since there is no process step to for starting~~
~~the displaying of the charging amount indicator, the operator can tell immediately~~
~~that the mode is not at the mode 2 due to the difference of the display. Therefore,~~
~~the operator thinks recognizes that the indicator was mishandleding is wrongly~~
~~done, and proceeds to the step 825, then reconducts and re-executes the checking~~
~~operation flow. On the other hand Furthermore, if the process flow is at the step~~
~~810, and if the indicator handling is performed is handled twice two times or more,~~
~~the second handling of the indicator handling is would typically signal an operation~~
~~for starting the displaying of the charging amount indicator. However In in this~~
~~check flow, since there is no process to start the displaying of the charging amount~~
~~indicator, and the operator can therefore tell immediately recognize that the mode~~
~~is not at the mode 3 due to the difference of the display. Therefore, the operator~~
~~thinks recognizes that the indicator was mishandleding is wrongly done, and~~
~~proceeds to the step 825, then and re-conducts re-executes the checking flow.~~

[0164] As described above, ~~with in the present embodiment, at the in mode 1, by~~
~~performing applying~~ an external input operation to the electronic timepiece,

discharging is ~~carried out~~ implemented by fast-forwarding drive in the motor unit D, or by short-circuiting of the motor drive circuit E, or the like. Accordingly, no special provision for discharging the battery is necessary. ~~And~~ Additionally, when the operational mode becomes the shifts to mode 1, the shift takes place from the normal hand movement state to the different state of fast-forwarding hand movement or hand movement stoppage. By ~~looking~~ observing the difference of the in hand movement, the mode shift is easily verified.

[0165] In the above embodiment, the external input operation is performed by use of the crown and the indicator switch. But the present invention is not limited to this. It is possible to use other mechanical input methods. ~~And it~~ It is also possible to furnish ~~provide~~ an infrared remote control receiver unit in the electronic timepiece, and use infrared signaling as the input method. Electricity, a radio wave, light, sound, an electromagnetic wave, heat, and the like are also applicable suitable as input methods.

[0166] In the above embodiment, discharging ~~at the in mode 1~~ is continued until the battery voltage reaches the prescribed voltage. ~~And w~~ When the battery voltage reaches the prescribed voltage, the discharging and the hand movement stop. Accordingly, by the hand movement (fast-forwarding or stoppage), ~~judging it is possible to determine whether discharging continues is ongoing or discharging is completed.~~ And Also, by the battery voltage recovery effect when the battery voltage drifts exceeds beyond the predetermined voltage, due to the battery voltage recovery effect, discharging is resumed and is repeatedly carried out executed until the voltage becomes is returned to the predetermined voltage. Accordingly, ~~the~~ The battery voltage after discharging becomes is thereby made stable.

[0167] Also, in the above embodiment, two setting values of the discharging current amount are provided, heaving load discharging in. ~~At the first stage is heavy load discharging, at the second stage is and light load discharging in the second stage.~~ Therefore it is possible to control the battery voltage to the predetermined voltage in ~~less a~~ shorter time period. More than two setting values of the discharging current amount can be provided.

[0168] ~~And~~ Furthermore, ~~at the in mode 2, it is possible to shifting to the charging mode by operation of an external input on the electronic timepiece is possible, and after the mode shifting, the operation is done executed in the normal hand operation state.~~ When During a charging operation, when the voltage reaches the predetermined (i.e. completion) voltage level, by changing the hand movement state the a notification is made that the charging is done to the predetermined voltage level or more higher, has been achieved is made by changing the hand movement

state. The changing of the hand movement at this time is not limited to the above form, and can be arranged in any other form as long as it is possible to tell the difference of before and after charging completion.

[0169] ~~At the~~In mode 2, during the charging of the battery, ~~there is a false the~~
~~observed voltage increase rise can be false (i.e. transient).~~ ~~Therefore~~That is, even
~~though when the~~ observed voltage once first reaches the completion voltage level,
the battery voltage can ~~decline gradually fall to the~~ a real charged voltage gradually
after completion of the charging (i.e. the charging operation is stopped). But, in the
present embodiment, in ~~the case a situation~~ where the charging voltage ~~once~~
reaches the charging completion voltage level if and the charging voltage then falls
below the charging completion voltage level, ~~again the~~ hand movement again
returns to the normal hand movement. Accordingly, after completion of the
charging, by leaving the timepiece until the false battery voltage becomes the real
voltage and then confirming the hand movement, it is possible to prevent a ~~mis-~~
~~judgement misinterpretations~~ due to a false voltage ~~increase~~ high.

[0170] In the above embodiment, if ~~detection is made it is~~ successively detected
that the motor does not rotate when ~~the a~~ normal motor drive pulse is supplied, a
drive pulse having ~~bigger greater~~ effective electric power than the normal driving
pulse is ~~supplied applied~~. And ~~at the~~In mode 3, if the drive pulse is successively
output ~~successively a~~ predetermined number of times (or more), the judgement ~~it is~~
~~made determined~~ that ~~the a~~ a problem where the motor trouble of is not driven by
application of the a normal drive pulse has occurred. Thus the hand movement is
changed, and ~~the~~ notification of the motor ~~trouble problem~~ is made.

[0171] ~~At the~~In mode 3, by operation of external input on the electronic timepiece,
the mode is shifted to a poor quality detection mode, and the electronic timepiece is
operated in a predetermined hand movement. Therefore, by changing the hand
movement state of before and after this shift, it is made possible to easily confirm
the mode shift.

[0172] ~~And~~Further, once the trouble is detected, the hand movement at the trouble
detection is continued, therefore it is possible to easily confirm the result of trouble
detection.

[0173] ~~And~~Also, ~~at the in~~ mode 3, because it is possible to perceive the motor drive
trouble by the hand movement, it is made possible to identify the trouble.

[0174] Also, it becomes possible to detect that the motor quality is somewhat lower
than the satisfying quality but is not bad enough to cause stoppage (time keeping
continuation trouble) or delay, both being difficult to detect hitherto. Therefore,

quality improvement is expected. Namely, if the motor quality is a bit poor and the detection of the non-rotation is frequently made, the motor will be driven by the auxiliary pulse having bigger effective electric power than the normal driving pulse. Therefore, time delay does not ~~happen~~ occur. ~~But However,~~ because of the frequent output of the auxiliary pulse, power consumption rises and remaining operation time is shorteneds. This kind of quality problem cannot ~~could~~ previously not be properly discovered until now due to no time delay being observed, but ~~the~~ mode 3 makes the detection certain.

[0175] In the above embodiment, no special check equipment is necessary to conduct the operation check function. Therefore the present invention is easily applicable to ~~the cases of~~, for example, advancing to foreign market, or assembling at several regions or places. And even after the shipment for example at the store or at the sales department or the like, it is possible to verify the timepiece operation easily.

[0176] Methods corresponding to the modes 1 to 3 mentioned above can be ~~solely~~ individually used, ~~For example~~ the following utilizations are possible.

[0177] Manufacturing and using battery voltage adjusting devices corresponding to the mode 1.

[0178] Manufacturing and using check devices or full-charge notification devices corresponding to the mode 2.

[0179] Manufacturing check devices corresponding to both of the mode 1 and 2, and using them for checking of generation unit of analog, digital, or analog-digital combination ~~electricalelectric~~ electric timepieces.

[0180] Configuring operation check system corresponding to all of the mode 1, 2, and 3, and using them for operation checking of analog, digital, or analog-digital combination ~~electricalelectric~~ electric timepieces.

[0181] Combining the modes 1 and 3, and using for various devices.

[0182] Combining the modes 2 and 3, and using for various devices.

[0183] Also, in the above embodiment, the operation result of each mode (states of discharging or charging or operation check result) is revealed by changing the displaying state (hand movement state) on the time displaying section. But this is not limited to the above form, and other method can be used to reveal the operation result of each mode. For example, if the timepiece has a digital displaying section, it is possible to change the displaying state from the non-displaying state to other state, and thus to enable the notification of the operation result. And if the

timepiece has a sound wave generating element or display light, by shifting of sound generation and sound non-generation, by turning the light on/off, by shifting of the sound generation state (frequency, generation cycle, or the like), or by changing the flashing period of the display light, it is possible to notify the charging state or the check result.

[0184] The embodiment of the present invention is not limited to the above embodiment. For example, the charging device for the battery is not limited to the provision as an internal unit, but can be provided as a removable unit or as an external unit.

[0185] In the above embodiment, a timepiece is exemplified with a generator of an oscillating weight or the like is driven by kinetic energy and the electricity is generated by the rotation from the oscillation weight and then by the electricity the timepiece works. But the present invention is not limited to this. Other generation methods ~~is~~ are also possible for an ~~electrical~~ electric timepiece such as ~~seizing~~ using light energy ~~with~~ from a solar panel, such as ~~seizing~~ using thermal energy with a Peltier element, and such as ~~seizing~~ using strain energy ~~with~~ from a piezo element. Other method is also possible for an ~~electrical~~ electric timepiece by providing electricity generated by an electromagnetic induction from outside of the timepiece, and then a stepping motor is moved by the electricity. In addition to timepieces, the present invention is applicable to stopwatches and other time keeping apparatus. And the raising and lowering circuit 49 can be omitted. In that case, the circuit driven by the output voltage VSS of the circuit 49 is driven by the output voltage VTKN of the battery 48.

SUBSTITUTE SPECIFICATION
(Clean Version)

**Electronic Timepiece With Checking Function, And Its Checking Method
Therefor**

Inventors: Shinji Nakamiya
Katsuyoshi Takahashi

BACKGROUND OF THE INVENTION

Field of the Invention

[0001] This invention relates to an electronic timepiece powered by a rechargeable battery, and to a checking method for the timepiece.

Description of the Related Art

[0002] There exists a variety of portable electronic timepieces such as wristwatches and electric clocks. Some of these timepieces have a rechargeable power source such as rechargeable batteries or large-capacitance capacitors. Some others have removable battery units. In timepieces, time-keeping units and digital (or analog) displaying units for displaying time operate by using electric power stored in the power source.

[0003] FIG. 11 is a flowchart showing an example of a manufacturing process and a checking process for a timepiece with a battery and a charging means for the battery.

[0004] In FIG. 11, discharging step A101 is conducted before the remaining steps in the manufacturing process of the electric timepiece.

[0005] In discharging step A101, by use of an external discharging circuit, such as that shown in FIG. 12, the battery alone is discharged. In the external discharging circuit 100 shown in FIG. 12, a plurality of batteries (i.e. n batteries) from BA1 to BAn are placed on a battery mounting section 101. Each battery from BA1 to BAn is connected in series to a resistor from R1 to Rn, respectively. A sink type constant voltage power source 102 is connected in parallel to each of the above series-connected resistors and batteries. In the above-configured external discharging circuit 100, batteries BA1 to BAn are discharged at the same time. In this case, the number of installation terminals for the batteries in the external discharging circuit 100 has to be enough for the number of batteries to be discharged at the same time.

[0006] After battery discharging step A101, an assembling step A102 and an exterior installation step A103 are conducted. Then a battery charging step A104 is conducted.

[0007] In this charging step A104, the quality of the charging function of the battery is examined, and enough electric energy for operation of the next step (i.e. an operation checking step A105) is stored in the battery. Charging is conducted in the following ways. In a timepiece having a rotating type generator, causing the timepiece to vibrate moves an oscillation weight in the rotating-type generator of the timepiece, and kinetic energy in the oscillation weight is converted by the generator into electric energy, which is subsequently stored in the battery. In a timepiece having a solar panel, electric energy is generated by the solar panel, and the generated electric energy is stored in the battery. In yet another type of timepiece, it is possible to generate electric energy from an inductive energy source, such as an exterior radio wave or a magnetic force, and to thereby charge the battery.

[0008] Confirmation of a charging state is conducted as follows. in the charging step, an operator activates a charging state display function that is installed in the timepiece. The operator then checks the display to confirm whether the battery is charged.

[0009] Battery discharging step A101 is implemented to maintain the accuracy of the monitoring of battery voltage in the charging step to within a certain range.

[0010] In operation checking step A105, quality verification for the electric timepiece is conducted. This quality verification comprises timepiece operation verification at high and low temperatures. Specifically, in the operation checking step, a trial operation lasting several hours or several tens of hours is conducted at an ambient temperature of about 60 degree centigrade and at an ambient temperature of about minus 10 degree centigrade. During this trial operation period, the timepiece is checked for stoppage and for a delay in displayed time. Then, by confirming a continuous discharging time of the battery after the trial operation, quality confirmation (judgment) is conducted.

[0011] After operation checking step A105, a shipment checking step A106, including an exterior check, and a full-charging step A107 to fully charge the battery are conducted, and then the timepiece is shipped (step A108).

[0012] It is to be noted, in the battery discharging step explained above, the battery alone is discharged by using the external discharging circuit before assembly, and that discharging the battery requires from several to several tens of

hours. Therefore, a discharging circuit facility requires enough battery installation terminals for one day's production. Hence, this discharging method is not appropriate for a model produced on a massive scale.

[0013] Also if, for example, after the shipment, a verification operation of a discharging function is required, it is very difficult for the battery to be discharged to a predetermined level without a discharging facility.

[0014] Moreover, there are several kinds of batteries. Even among lithium type batteries, discharging characteristics differs, for example, according to types of electrodes, as shown in FIG. 13. Also, rechargeable batteries have a characteristic of voltage recovery effect by which, after discharging is stopped, voltage rises. Therefore battery voltage is unstable and becomes dispersed after discharging. This voltage dispersion after discharging adversely affects the accuracy of checking.

[0015] Furthermore by purchasing a certain switch while in the charging step, a charging state, such as charged voltage, is indicated by an amount of fast-forwarding movement of the analog second hand on the displaying section. In this case, an external operation such as pushing a certain switch or the like is necessary to determine the charging state. Hence an external input is required, resulting in a problem of necessitating a further operation process. Also, since a use confirms a charging state by observing the amount of fast-forwarding movement of the analog second hand, , there is a possibility of misjudgment due to human error.

[0016] Additionally in the operation checking step, quality verification of the electric timepiece is conducted by checking its operation at both high and low ambient temperatures. More precisely, quality verification of the timepiece is conducted by checking whether the time piece experiences a stoppage (continuous time-keeping trouble) or a time delay under the above conditions. Therefore even when a problem is detected in the timepiece, it is difficult to determine whether the cause of the problem is due to the motor drive unit or due to the battery.

[0017] To confirm that a problem is due to motor drive trouble, it is necessary to examine a gear train unit that drives an hour hand, a minute hand and a second hand. To conduct this examination, it is necessary to dismantle the timepiece to a considerable extent requiring fine detail. Hence, in order to avoid this complicated dismantling examination procedure, there is a demand for simplifying the distinction between a problem due to motor drive trouble and a problem due to another factor. However, in the prior art, it is difficult to distinguish between a motor drive problem and a problem due to another factor.

[0018] Regarding motor drive trouble, when a motor does not appear to be of poor quality, it is not possible to judge that the trouble is due to the motor. However, for example, there exist some low quality motors which, under some temperature conditions, work without causing a delay. Ideally, such motors should also be judged to cause motor problems. However it is difficult to make such a judgment.

[0019] Taking the above situation into consideration, the object of the present invention is to provide an electric timepiece with a checking function which, for example, in the timepiece manufacturing process improves checking accuracy and efficiency, and a checking method for the timepiece.

Objects of the Invention

[0020] Therefore, it is an object of the present invention to overcome the aforementioned problems.

Summary of the Invention

[0021] To solve the above problems, in the timepiece of the present invention comprises an external input unit for receiving an external signal, a display section for displaying the time, a battery unit capable of being recharged, a drive unit for driving the display section using the electric power stored in the battery unit, a comparator unit, and a discharging control unit. The comparator unit monitors the voltage of the battery unit, and compares the voltage with a reference voltage. The discharging control unit, when a prescribed signal is input via the external input terminal, starts discharging the battery unit, and when the comparator unit detects a prescribed condition, stops discharging the battery unit.

[0022] The present invention provides the following advantages: timepiece operation can be checked with improved accuracy and efficiency; an external circuit for discharging the battery in the manufacturing process is unnecessary; and the voltage dispersion of the battery can be lowered before and after charging.

Brief Description of the Drawings

[0023] FIG. 1 is a block diagram showing a construction of a timepiece of one embodiment of the present invention.

[0024] FIG. 2 is a flowchart showing a process of manufacturing and checking the timepiece.

[0025] FIG. 3 is a block diagram showing construction of each part of the timepiece.

[0026] FIG. 4 is a circuit diagram showing the construction of the operation check function control circuit 310 shown in FIG. 3.

[0027] FIG. 5 is a circuit diagram showing a second external input unit measure circuit 311, operation check function mode select circuit 312, a stored electricity unit discharge control circuit 305, a stored electricity unit charging completion detect circuit 306, and a motor drive trouble detect circuit 304 shown in FIG. 3.

[0028] FIGS. 6A and 6B are timing charts showing operation of the operation check function control circuit 310 shown in FIG. 3.

[0029] FIG. 7 is an exemplary operational timing chart of the structure shown in FIG. 3.

[0030] FIG. 8 is a block diagram explaining a discharging current in a motor drive unit E shown in FIG. 3.

[0031] FIGS. 9A, 9B and 9C collectively form a flowchart showing flow of operation and checking process of the timepiece of the present invention.

[0032] FIG. 10 is a diagram explaining modes 1 to 3 of the operation check process.

[0033] FIG. 11 is a flowchart showing an operation and checking process of a timepiece according to prior art.

[0034] FIG. 12 is a circuit showing an external discharging circuit for batteries according to prior art.

[0035] FIG. 13 is a diagram showing discharging characteristics of two types of lithium rechargeable battery (MT: which uses manganese and titanium for electrode, CT: which uses titanium and carbon for electrode).

Description of the Preferred Embodiments

[0036] With reference to the drawings, one embodiment of present invention will be described. FIG. 1 is a block diagram which shows a construction of the timepiece 1 of one embodiment of the present invention. In FIG. 1, the timepiece 1 is a wristwatch. The electric timepiece 1 comprises a generator system A, a power supply system B, a control unit C, a motor unit D, a motor drive circuit E, a first external input terminal F, and a second external input terminal G. A brief explanation of the operation of these components follows. The generator system A generates alternating current. The power supply system B rectifies the alternating current, then stores the generated energy into the battery unit 48, and then raises or lowers the stored voltage, and then supplies power to the electrically driven components. The control unit C controls the entire timepiece 1. The motor unit D

comprises a second hand 61, a minute hand 62, a hour hand 63, and a stepping motor 10 for moving the hands. The motor drive circuit E is a circuit for driving the stepping motor 10 in the motor unit D, based on a control signal from the control unit C. The first external input unit F and the second external input unit G are means for changing modes in an operation check process. This operation check process is one feature of the timepiece 1 of the present invention.

[0037] The generator system A comprises a generating apparatus 40, an oscillating weight 45, and an acceleration gear 46. The generating apparatus 40 in FIG. 1 is an electromagnetic induction type AC generator apparatus. The electromagnetic induction type AC generator apparatus comprises a generator rotor 43, a generator stator 42, and a generator coil 44. The oscillating weight 45 is a means for providing the generator rotor 43 with energy. In this wristwatch type electric timepiece 1, the oscillating weight 45 is made to rotate by movement of a user's arm. The movement of the oscillating weight 45 is transmitted to a generator rotor 43 via an acceleration gear 46. Then the generator rotor 43 rotates in a generator stator 42. thus voltage is induced in the generator coil 44. The voltage is output from two output terminals of the generator coil 44. In this way, in the generator system A, power generation is achieved by use of energy related to the user's everyday life.

[0038] The power supply system B comprises a rectifier circuit 47, a battery (a battery unit) 48 and a voltage raising and lowering circuit 49. The alternating voltage from the generator system A is rectified by the rectifier circuit 47 into a direct voltage, and is stored in the battery (the battery unit) 48. The battery unit 48 comprises a large-capacitance capacitor or a rechargeable battery such as a lithium battery. The direct voltage stored in the battery 48 is supplied to the voltage raising and lowering circuit 49. The voltage raising and lowering circuit 49 is a circuit for, by using more than one of capacitors 49a to 49c, raising or lowering the direct voltage by multiple factors. The output voltage of the voltage raising and lowering circuit 49 is controllable by a control signal $\phi 11$ from the control unit C.

[0039] In the structure shown in FIG. 1, higher electric potential side of battery 48 is identified as a reference electric potential GND. The lower electric potential side of battery 48 is identified as a first voltage low reference VTKN, and a second voltage on the lower electric potential side of raising and lowering circuit 49 is identified as a second voltage low reference VSS. Output voltage of generator coil 44 is input to control unit C as a control signal $\phi 13$. Voltage VSS is input to the control unit C as a control signal $\phi 12$.

[0040] A motor drive circuit E creates a drive pulse based on a drive clock supplied from control unit C, and then provides the drive pulse to a stepping motor 10 in motor unit D. Stepping motor 10 comprises a rotator section. The rotator section rotates by a fixed amount when a drive pulse is applied to stepping motor 10. The rotation of the rotating part of stepping motor 10 is transmitted to second hand 61 by way of a second intermediate wheel 51 and a second wheel 52, both wheels being connected to the rotating part. The second hand thus rotates providing an indication of the passage of time in seconds. Additionally, the rotation of the second wheel 52 is transmitted to a minute intermediate wheel 53, a minute wheel 54, an hour intermediate wheel 55, and an hour wheel 56. The minute wheel 54 is connected to a minute hand 62. The hour wheel 56 is connected to a hour hand 63. Therefore these hands works in conjunction with the rotation of stepping motor 10, and thereby indicate the passage of time in hours and minutes.

[0041] Although not described in the drawings, it is possible to connect other transmission systems to the gear train 50 which is constructed of wheels 51 to 56 in order to display a calendar and so on. For example, to display a date, it is possible to add a cylindrical intermediate wheel, an intermediate date wheel, and a date wheel and so on. Further still, it is possible to add a calendar correction gear train (such as a first calendar correction wheel, a second calendar correction wheel, a calendar correction wheel, and a date disc).

[0042] The first external input unit F comprises a crown for setting time and a circuit for electrically detecting the time-setting operation. In this embodiment, the second external input unit G is used as a switch for starting an operation check function of the timepiece 1. The second external input terminal G is an indicator switch installed on the exterior section of the wristwatch. The second external input terminal G is used to confirm the charging state of battery 48. Also in this embodiment, the second external input terminal G is used as a switch for inputting a signal to change between modes 1 to 3 while performing the operation check process (B100). Operation state of the first external input unit F and the second external input unit G is input to the control unit C in the form of an electric signal.

[0043] With reference to FIG. 2, an outline of the operation check process of this embodiment will be described. FIG. 2 is a flowchart showing an example of a manufacturing and checking process of the electric timepiece of the present embodiment. The operation check process B100 is conducted after the manufacturing process (step A102) and the exterior installation process (step A103). The operation check process B100 has three steps (step B101, step B104, and step

B105). These three steps are conducted by using functions of modes 1 to 3 which are present in the timepiece.

[0044] The first process (step B101) of the operation check process B100 corresponds to discharging step A101 in FIG. 11. The first process is executed as a preparation step for checking the charging function of timepiece 1. In this first process, use of mode 2 of timepiece 1, starts an electric power consumption circuit, which discharges electric charge from battery 48 and thereby controllably drops the voltage of the battery to prescribed voltage level.

[0045] The second process step (step B104) of the operation check process B100 is a process for determining the efficiency, or quality, of a charging operation. This second process is implemented by a charging-performance-quality-judge function of mode 2 of timepiece 1. More specifically in this second process, the electric timepiece 1 is supplied with a vibration, and its internal oscillating weight is thereby made to rotate. Thus, electricity is generated in generator system A, and battery 48 is charged. Then, the charging-performance-quality-judge function of mode 2 determines if the battery's voltage reaches a charge-complete voltage level within a prescribed period of time, and the result is conveyed to the user by movement of second hand 61. That is, mode 2 determines if the battery is charged up to a predetermined voltage level within a prescribed time period, and outputs the result.

[0046] The third process (step B105) of the operation check process B100 is a process for poor quality detection by operating the timepiece 1. In more detail, in this third process, at high or low temperatures, although motor drive circuit E is able to rotate stepping motor 10, drive circuit E generates an irregular motor drive pulse, which will result in higher electric power consumption. Operation at these severe conditions enable detection of motor trouble, which is not detectable when generating a normal motor drive pulse. When trouble is detected, movement of, for example, second hand 61 is changed from a normal state to a different state, which state is maintained. The user sees that the movement of second hand is different than in the normal state, and thereby knows that there is a problem with the motor.

[0047] Next, with reference to FIGS. 3 to 8, details of each part of timepiece 1 shown in FIG. 1 will be described. FIG. 3 is a block diagram showing detail of the construction of the control unit C, and signal flows between units of from A to G. In FIG. 3, blocks of from 301 to 312 are circuit blocks in the control unit C, and those surrounded by dashed lines are not.

[0048] The charge detecting circuit 301 receives the output voltage of generator coil 44 as a generation voltage signal SW ($\phi 13$), and, in accordance with the signal,

detects a generation state of the generator system A. Then the circuit 301 outputs a signal indicating a detection result of the charging state as a charge detect result signal SA. Signal SA which is input to rectifier circuit 47 in power supply system B is used as a signal for controlling a rectification operation. The rectified output of rectifier circuit 47 is supplied to battery 48 (the battery unit) as a rectification output signal SB. A stored voltage signal SC showing the stored voltage (=VKTN) of battery 48 is applied to a raising and lowering circuit 49 and a voltage detecting circuit 302.

[0049] The voltage detecting circuit 302 receives the stored voltage signal SC, a stored voltage raising and lowering result signal SD (ϕ_{12} =VSS), and a voltage detect control signal SX. The stored voltage raising and lowering result signal SD is a signal indicating the output voltage of the raising and lowering circuit 49. The voltage detect control signal SX is output from a timepiece control circuit 303. The voltage detecting circuit 302, when the voltage detect control signal SX is active, compares the signal SC, which indicates the stored voltage VKTN, with predetermined reference comparison voltages of DCHRGV and CHRGV respectively, then outputs a voltage detect result signal SN comprised of bits SN1 and SN2 indicating respective comparison results.

[0050] It is to be noted that rather than comparing stored voltage VKTN with the reference comparison voltages, it is possible to compare the raising and lowering voltage VSS with the reference voltages and to output the comparison result as signal SN.

[0051] For example, when the raising and lowering circuit 49 is operated to provide a raising factor of 2, if it is detected that the absolute value of VSS is 1.25 V, outputting the voltage detect result signal SN indicating the absolute value of VKTN of 0.625 V gives an equivalent effect.

[0052] The timepiece control circuit 303 uses the output voltage VSS of the raising and lowering circuit 49 as a power source. The timepiece control circuit 303 receives a first and a second stored electricity unit discharge control signals SO1 and SO2 from a stored electricity unit discharge control circuit 305, a stored electricity unit charge completion control signal SP from a stored electricity unit charging completion judge circuit 306, a motor drive trouble judge signal SQ from a motor drive trouble judge circuit 304, a high-frequency magnetic field detect result signal SK from high-frequency magnetic field detect circuit 307, an alternating current magnetic field detect result signal SL from an alternating current magnetic field detect circuit 308, and a rotation detect result signal SM from a rotation detect circuit 309.

[0053] Then the timepiece control circuit 303 generates the voltage detect control signal SX, and supplies it to the voltage detecting circuit 302.

[0054] The timepiece control circuit 303 generates motor driving signals SE, SF, SG, and SH, and supplies them to the motor drive circuit E, and also generates a non-rotation detect measure signal SY, and supplies it to the motor drive trouble judge circuit 304.

[0055] The motor drive signal SE is a pulse signal comprised of a normal driving pulse, a rotation detect pulse, a high frequency magnetic field detect pulse, a magnetic field detect pulse, an auxiliary pulse, and so on. The normal driving pulse is a pulse supplied to the motor drive circuit E for a regular motor drive. The rotation detect pulse is a pulse supplied to the motor drive circuit E when detecting whether there is a high-frequency magnetic field. The high frequency magnetic field detect pulse is a pulse supplied to the motor drive circuit E for detecting an external magnetic field. The auxiliary pulse is a pulse that is output when the motor fails to rotate in response to only the normal driving pulse. This auxiliary pulse has higher effective electric power than the normal driving pulse. When the auxiliary pulse is generated, the non-rotation detect measure signal SY is generated.

[0056] The motor driving signal SF is a pulse for controlling the motor driving circuit E when discharging the battery 48.

[0057] The motor driving signal SG is a pulse for controlling the motor unit D when charging of battery 48 is completed.

[0058] The motor driving signal SH is a pulse for controlling the motor unit D for hand movement other than normal hand movement, and is output when motor trouble takes place.

[0059] When a high-frequency magnetic field detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The high frequency magnetic field detect circuit 307 is a circuit detecting existence of a high-frequency magnetic field by comparing a voltage SJ of the induced voltage with the pre-determined reference value for alternating current magnetic field detection.

[0060] When a magnetic field detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The alternating current magnetic field detect circuit 308 is a circuit for detecting existence of an alternating current magnetic field by

comparing a voltage SJ of the induced voltage with the pre-determined reference value for alternating current magnetic field detection.

[0061] When a rotation detect pulse is supplied to the motor drive circuit E as the motor drive signal SE, a bidirectional induced voltage is generated in a drive coil of the stepping motor. The rotation detect circuit 309 is a circuit for detecting existence of a rotation of the drive motor by comparing a voltage SJ of the induced voltage with the pre-determined reference value for rotation detection.

[0062] It is to be noted that a section in the timepiece control circuit 303 for outputting the motor drive signal SE, the high frequency magnetic field detect circuit 307, the alternating current magnetic field detect circuit 308, and the rotation detect circuit 309 are based on known techniques used for controlling a stepping motor drive. For example, the technique is described in Japanese Patent Application Laid-Open Publication No.10-225191 entitled "Control Device for Stepping Motor, Its Control Method, and Time Keeping Device", and Japanese Patent Publication No. 3-45798 entitled "Analog Electric Timepiece", both of which are hereby incorporated by reference.

[0063] An operation check function control circuit 310 receives a first external input signal SR1 and a first external input differential signal SR2. The first external input signal SR1 is a signal output from a first external input unit F, indicating that a switch (a crown) in the first external input unit F is operated. The first external input differential signal SR2 is a differentiated signal of the first external input signal SR1. The operation check function control circuit 310 outputs an operation check function control signal SS.

[0064] A second external input unit measure circuit 311 receives an operation check function control signal SS and a second external input signal ST. The second external input signal ST is a signal output from a second external input unit G, indicating that a switch (a crown) in the second external input unit G is operated. The second external input unit measure circuit 311 outputs an operation check function mode select signal SU which has two bits of SU1 and SU2.

[0065] The operation check function mode select circuit 312 receives the operation check function mode select signal SU and the operation check function control signal SS. And the operation check function mode select circuit 312 outputs an operation check function mode select result signal SV which has three bits of SV1, SV2, and SV3. The three bits of SV1, SV2, and SV3 of the operation check function mode select result signal SV are input to the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the motor drive trouble judge circuit 304 respectively. A bit SV1 of the operation check

function mode select result signal SV is a bit indicating by positive logic that the operation check function is in the mode 1. The bit SV1 is at a high level when the mode of the operation check function is in the mode 1. A bit SV2 is a bit indicating by positive logic that the operation check function is in the mode 2. The bit SV2 is at a high level when the mode of the operation check function is in the mode 2. A bit SV3 is a bit indicating by negative logic that the operation check function is in the mode 3. The bit SV3 is at a low level when the mode of the operation check function is in the mode 3.

[0066] Next, referring to FIGs. 4, 5, and 7, a description will be provided with respect to the operation check function control circuit 310, the second external input unit measure circuit 311, the operation check function mode select circuit 312, the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the motor drive trouble judge circuit 304.

[0067] FIG. 4 is a circuit diagram showing the detailed operation of check function control circuit 310 shown in FIG. 3. The operation check function control circuit 310 comprises two 2-bit counters 401 and 402, a 1-bit counter 403, two D flip-flops 404 and 405, an SR latch 406, three double-input ORs 407 to 409, a double-input AND 410, a double-input XNOR (exclusive logic addition of negative logic output) 411, and ANDs 412 and 413 each of which has a positive logic input terminal and a negative logic input terminal.

[0068] An output signal of OR gate 408 is input to the reset terminal R of the 2-bit counter 401. A clock signal F1 having a cycle of one second is input to the clock terminal CLK of the 2-bit counter. The 2-bit counter 401 counts the clock signal F1 when the output signal of the OR 408 is at a low level.

[0069] The first external input signal SR1 is input to the positive logic input terminal of the AND 412. The signal SR1 is set to a high level when the crown, which is the switch of the first external input unit F, is pulled out by two clicks.

[0070] The first external input differential signal SR2 is input to the positive logic input of the AND 413. The signal SR2 is a differentiated signal of the signal SR1. In more detail, the signal SR2 is generated when the crown in a state of being pulled out by two clicks is pushed back by one click or two, the first external input signal SR1 is reset from a high level to a low level. The signal SR2 is a single pulse signal having a predetermined pulse width.

[0071] The operation check function mode select circuit 312 outputs the operation check function mode select result signal SV2, which is applied to the negative logic input AND gates 412 and 413. When the signal SV2 is at a low level, AND gates

412 and 413 output the first external input signal SR1 and the first external input differential signal SR2 as they are.

[0072] The clock signal F1 having a cycle of one second is input to the clock terminal CLK of the 1-bit counter 403. The output of AND gate 412 is input to the active low reset terminal R of the 1-bit counter 403. The 1-bit counter 403 counts pulses in clock signal F1 when the output signal of AND gate 412 is at a high level.

[0073] The data terminal D of D flip-flop 404 is fixed at a high level. The reset terminal R of D flip-flop 404 is active low. The output of AND gate 412 is applied to the reset terminal R of D flip-flop 404. Output XQ of 1-bit counter 403 is applied to the clock input terminal, CLK, of D flip-flop 404. Accordingly, when the output signal of AND gate 412 is at a high level, D flip-flop 404 responds to a rise at output XQ of 1-bit counter 403 by latching in the high level at its data terminal D and outputting the same from its output terminal Q.

[0074] The data terminal D of the D flip-flop 405 is fixed at a high level. Reset terminal R of D flip-flop 405 is active low and it receives the output from AND 410. The output from AND gate 412 is applied to the clock input terminal CLK of D flip-flop 405. Accordingly, when the output signal of AND gate 410 is high, D flip-flop 405 will read its input high signal at its terminal D and output the same on output terminal Q in response to a rise at the output of AND gate 412.

[0075] The OR 407 receives the "2¹" output Q1 from 2-bit counter 401 and output Q from D flip-flop 405.

[0076] The output OR gate 407 coupled to the set terminal S of SR latch 406. Output Q of D flip-flop 404 is applied to the reset terminal R of SR latch 406.

[0077] The OR 409 outputs the logic OR function of the output Q of SR latch 406 and the output of AND gate 413.

[0078] The output of OR gate 409 is applied to the clock terminal CLK of 2-bit counter 402. The output Q of SR latch 406 is applied to the reset terminal R of 2-bit counter 402. When the output of SR latch 406 is at a low level, counter 402 counts signal SR2 supplied via AND gate 413 and OR gate 409. Here, when the output of OR 407, which is coupled to the set input S of SR latch 406 is at a low level, the output Q of SR latch 406 is reset in response to a high level signal at its reset input R.

[0079] The 2-bit counter 402 has a "2⁰" output (i.e. Q0) and a "2¹" output (i.e. Q1). These output terminals are connected to input terminals of AND gate 410. When output Q of SR latch 406 is at a low level, signal SR2 is permitted to pass through OR gate 409 to 2-bit counter 402. Thus, if the output of SR latch 406 is low, and

three SR2 pulse signals are applied to the the 2-bit counter 402, the outputs (Q0 and Q1) of the 2-bit counter 402 will go high upon the third pulse of signal SR2 and cause the output of AND gate 410 to become high.

[0080] The output signal of the AND 410 is output as operation check function control signal SS from the operation check function control circuit 310. The signal SS, when at a high level, starts the operation check function. Signal SS is also input to the active low reset input R of D flip-flop 405, as mentioned above.

[0081] The XNOR 411 outputs a high level, when both of the "2⁰" output Q0 and the "2¹" output Q1 of counter 402 are at a low level or both are at a high level. XNOR 411 outputs a low level when both Q0 and Q1 of counter 402 at different levels.

[0082] OR gate 408 outputs a logical OR function of the output signal from XNOR 411 and the output signal from AND gate 413. The output of OR gate 408 is applied to reset terminal R of 2-bit counter 401.

[0083] FIG. 6A, 6B, and 7 are timing diagrams of a function of the operation check function control circuit 310 explained above.

[0084] First, when the operation check function mode is other than mode 2, the operation check function mode select result signal SV2 is at a low level, and the operation check function control signal SS which is at a low level will be described.

[0085] In this case, the operation check function control circuit 310 receives the signal SR1 which is at a high level for more than 1 or 2 seconds (period T1) of time, and from the time the signal SR1 is set to a low level, when the signal SR1 falls twice continuously from a high level to a low level at an interval T2, namely less than an average of 1.5 second, sets the operation check function control signal SS to a high level.

[0086] This operation is described with reference to FIGs. 6A and 6B.

[0087] At the initial state, the output signal Q of the SR latch 406 is at high level, both the output signals Q0 and Q1 of the counter 402 are at a low level, the signal SS is at a low level, the output signal of the dual-input XNOR gate 411 is at a high level, both the output signals Q0 and Q1 of the counter 401 are at a low level, and the output signal Q of D flip-flop 405 is at a low level.

[0088] When the crown is pulled out to the second click, the signal SR1 is set to a high level. As a result, the output signal of AND gate 412 is set to a high level, and the reset of the counter 403 and the D flip-flop 404 are cancelled.

[0089] After this cancellation, when the first clock pulse F1 is generated, counter 403 counts this clock pulse F1 causing its output signal XQ to fall (arrow a1).

[0090] When the second clock pulse F1 is generated, counter 403 counts this pulse and its output signal XQ rises (the arrow a1). As a result, a high level signal is input to the clock input of D flip-flop 404, and output Q of the D flip-flop 404 rises (arrow a3). Then due to this rise in the output Q of D flip-flop 404, SR latch 406 is reset, and the output Q of SR latch 406 is reset to a low level (arrow a4). Because the output of SR latch 406 is reset to a low level, the reset state of counter 402 is cancelled, and counter 402 enters a state where it can actively count.

[0091] Next, when the crown is pushed back from the second click to the first click or to the normal position, the signal SR1 falls to a low level. As a result, counter 403 and D flip-flop 404 are reset, and output Q of the D flip-flop 404 is set to a low level.

[0092] On the other hand, when pulse signal SR2 is generated by the fall of signal SR1, pulse signal SR2 starts counter 402, and the output Q0 of counter 402 rises to a high level (arrow a6). As a result, the output signal of XNOR gate 411 is set to a low level (arrow a7). Thus the reset state of counter 401 is cancelled, and counter 401 is set to an active counting state, i.e. a state where it can actively count.

[0093] As described above, after the crown is pulled out to the second click, when two clock pulses F1 are generated, counter 402 is set to its active counting state. Then when the crown is pushed back to the first click or to the normal position, the counter 401 is set to its active counting state.

[0094] In the above description, in the period from the rise to the fall of the signal SR1, two clock pulses F1 are generated. However, a case where three or more clock pulses F1 are generated has a similar result.

[0095] Afterward, if the crown is not adjusted, signal SR1 does not change, and clock pulse F1 is generated, then counter 401 will continue to count and its output Q0 will be set to a high level (the arrow a8). Then if another clock pulse F1 is generated, it will be counted by counter 401 resulting in output Q0 of counter 401 being set to a low level, and output Q1 of counter 401 being set to a high level (arrow a9).

[0096] Then because the output signal Q1 of the counter 401 is set to a high level, the output Q of SR latch 406 is set to a high level (arrow a10). As a result, counter 402 is reset, output Q0 of counter 402 is set to a low level (arrow a11), and the output of XNOR gate 411 is set to a high level (arrow a12).

[0097] Then because the output signal of XNOR gate 411 is set to a high level, counter 401 is reset (arrow a13) and will not count even if clock pulse F1 is generated.

[0098] As described, even when counters 401 and 402 are set to their active counting state by pulling the crown to the second click and pushing it back to the original position, if the crown is not adjusted, the operation check function control circuit 310 returns to the state before adjusting the crown, and signal SS does not change.

[0099] In comparison, when counters 401 and 402 are set to their active counting state by pulling the crown to the second click, if a prescribed crown adjusting is carried out, signal SS is raised by the operation check function control circuit 310.

[0100] FIG. 6B will now be described. Operations relating to arrows a1 to a7 are the same as those described with reference to FIG. 6A.

[0101] As described in FIG. 6A, after the crown is pulled out to the second click, when two clock pulses F1 are generated, counter 402 is placed in its active counting state. Then when the crown is pushed back to the first click or to the normal position, counter 401 is placed in its active counting state (arrows a1 to a7).

[0102] Afterward, if the clock pulse F1 is generated, this clock pulse F1 is counted by counter 401, and the count value of counter 401 becomes "1" (arrow a11). However, if pulse SR2 is generated by adjusting the crown before the next clock pulse F1 is generated, counter 401 will be reset and its count value will become "0" (arrow a12). Counter 402 counts pulse SR2, and the count value of counter 402 will become "2" (arrow a13).

[0103] When clock pulse F1 is again generated, it will be counted by counter 401, whose count value will become "1" (arrow a14). But if pulse SR2 is generated by the adjusting the crown before the next clock pulse F1 is generated, counter 401 will be reset its count value will become "0" (arrow a15). Also, counter 402 will count pulse SR2, and its count value will become "3" (arrow a13). As a result, signal SS will be set to a high level (arrow a17). By this, the operation mode of the electric timepiece is set to mode 1, and the reset state of D flip-flop 405 is cancelled.

[0104] When the count value of counter 402 becomes "3", the output of XNOR gate 411 is set to a high level (arrow a18). As a result, counter 401 is reset. Therefore, further generations of clock pulse F1 will not be counted by counter 401 until it is set active again.

[0105] As described above and shown in Fig. 6B, three conditions are required to set signal SS to a high level. Firstly, during a period from the rise to the fall of signal SR1, two or more clock pulses F1 are generated. Secondly, another rise and fall pulse of signal SR1 is generated followed by another F1 pulse. Thirdly before the generation of a subsequent clock pulse F1, another rise and fall pulse of signal

SR1 (the pulse SR2) takes place, by which signal SS is set to a high level. Here, because the period of clock F1 is one second, the time period from the rise of signal SR1 to the fall of signal SR1, or the time period T1 in FIG. 7, will be fully complete within two seconds.

[0106] The time period from the first fall to the second fall of the signal SR1, or the time period from the third fall to the fourth fall of the signal SR1, or the time period T2 in FIG. 7, will be completed within 1.5 seconds.

[0107] Next, the state when the operation check function mode select result signal SV2 is at a low level, and the operation check function control signal SS is at a high level will be described.

[0108] In this case, when the signal SR1 rises, the mode 1 is cancelled. This operation is described in reference to in FIG. 6B.

[0109] First, when the signal SR1 rises, a high level signal is input to D flip-flop 405, and the output Q of D flip-flop 405 becomes is set to a high level (arrow a21). As a result, SR latch 406 is set (arrow a22), output a high signal at its output and thereby placing counter 402 in a reset state. As a result, the count value of counter 102 becomes "0" (arrow a23). Then because counter 402 is in its reset state, signal SS is set to a low level, and mode 1 is cancelled (arrow a24).

[0110] Since signal SS is at a low level, D flip-flop 405 is reset (arrow a25). The subsequent operation depends on the wave form of signal SR1, and is described above.

[0111] Next, reference to FIGS. 4 and 7, the state when the operation check function mode is to mode 2, and the operation check function mode select result signal SV2 is at a high level will be described.

[0112] In this case, even if the signals SR1 and SR2 changes, the operation check function control signal SS is not set to a low level.

[0113] Next, with reference to FIG. 5 a detailed description will be given with respect to the second external input unit measure circuit 311, the operation check function mode select circuit 312, the stored electricity unit discharge control circuit 305, the stored electricity unit charging completion judge circuit 306, and the motor drive trouble judge circuit 304.

[0114] The second external input unit measure circuit 311 comprises an inverter 501, a dual-input AND gate 502, and a 2-bit counter 503. The inverter 501 receives the operation check function control signal SS. The AND gate 502 receives the second external input signal ST and the operation check function mode select result

signal SV3. Here, the second external input signal ST is a signal that is set to a high level when the switch (indicator switch) of the second external input unit G is pushed back. The output of inverter 501 is applied to the reset input of the 2-bit counter 503, and the output of AND gate 502 is applied to the clock input of the 2-bit counter 503. Therefore, both signals SS and SV3 are at a high level, the 2-bit counter 503 is placed in its active counting state and counts the number of pulses of second external input signal ST (i.e. the number of many times the indicator switch is pushed back). Signal SV3 is generated by decoding the output of counter 503, and it is set to a low level when the count value of counter 503 is 2. Therefore, counter 503 counts from 0 to 2.

[0115] In an explanatory example of FIG. 7, after the operation check function control signal SS is set to a high level at time t1, bit signals SU1 and SU2 at respective outputs Q0 and Q1 of counter 503 are set at low levels. At time t2, as the signal ST, a pulse signal is input to the counter 503, bit SU1 of the counter 503 is set to a high level and bit SU2 of the counter 503 is set to a low level. At the time t3, as the signal ST, another pulse signal is input to the counter 503, the bit SU1 of the counter 503 becomes the low level and the bit SU2 of the counter 503 are set to a high level. When the bit SU1 is set to a low level and the bit SU2 is set to a high level, the signal SV3 is set to a low level. In this case, for example, even if, as the signal ST, a pulse signal is input to the counter 503, the output value of the counter 503 does not change. The counter 503 is reset when the signal SS is set to a low level (at time t5).

[0116] The operation check function mode select circuit 312 in FIG. 5 comprises an 3-input AND gate 504 (having two active low inputs and one active high input), an 3-input NAND 506 (having one active low input and two active high inputs). Bits SU1 and SU2 of counter 503 are applied to the two active low inputs of AND gate 504, and the operation check function control signal SS is applied to the active high input of AND gate 504. As shown in FIG. 7, when both the bits SU1 and SU2 of the counter 503 are at a low level and the operation check function control signal SS is at a high level, the AND gate 504 outputs the operation check function mode select result signal SV1 at a high level indicating the operation check function is at mode 1. In the same way, when the bit SU2 of the counter 503 is at a low level and both the bit SU1 and the operation check function control signal SS are at a high level, the AND gate 505 outputs the operation check function mode select result signal SV2 at a high level indicating the operation check function is at the mode 2. When the bit SU1 of the counter 503 is at a low level and both the bit SU2 and the operation check function control signal SS are at a high level, the NAND gate 506

outputs the operation check function mode select result signal SV3 at a high level indicating the operation check function is at the mode 3.

[0117] The stored electricity unit discharge control circuit 305 comprises an inverter 507, a D flip-flop 508, a dual-input AND gate 509, and a 3-input AND gate 510.

[0118] Voltage detect result signal SN1 is input to inverter 507. Signal SN1 comes from one the bit lines of the voltage detect result signal SN. The signal SN1 is set to a high level, when it is detected that the signal SC indicating the stored voltage VKTN becomes lower than the discharge reference voltage DCHRGV (further from the ground VDD, that is, not reaching the predetermined discharge voltage). It is to be noted, instead of the above configuration, it is also possible to set the signal SN1 to a high level, when it is detected that the stored voltage raising and lowering result signal SD which indicates the output voltage VSS of the raising and lowering circuit 49 becomes lower than the discharge reference voltage DCHRGV.

[0119] Regarding D flip-flop 508, the operation check function mode select result signal SV1 is input to the reset terminal R and the output signal of inverter 507 is input to the clock terminal CLK, and the data input terminal D is fixed at a high level.

[0120] AND gate 509 outputs the logic AND function of output XQ of D flip-flop 508 and the operation check function mode select result signal SV1 as the first stored electricity unit discharge control signals SO1.

[0121] AND gate 510 has an active low input and two active high inputs. The first stored electricity unit discharge control signals SO1 from AND gate 509 is applied to the active low input of AND gate 510. The operation check function mode select result signal SV1 and the discharge reference voltage DCHRGV are applied to the active high inputs of AND gate 510. AND gate 510 outputs the logical AND function of its input signals as the second stored electricity unit discharge control signals SO2.

[0122] As shown in FIG. 7, the stored electricity unit discharge control circuit 305 sets the first stored electricity unit discharge control signals SO1 to a high level when operation check function mode shifts to the mode 1 when the battery unit (battery 48) is being charged.

[0123] In a period P1 when the first stored electricity unit discharge control signals SO1 are at a high level, the timepiece control circuit 303 in FIG. 3 outputs as the motor driving signal SF a drive clock signal which short-circuits the motor drive circuit E or fast-forwards the motor unit D. Accordingly, during period P1 in

FIG. 7, the electric charge in battery unit 48 is released as a drive current on a scale much higher than that of the normal drive state of the motor unit D.

[0124] As discharging continues, when the stored electricity voltage VTKN or the stored electricity voltage raising and lowering result voltage VSS becomes higher than the discharge reference voltage DCHRGV (that is, nearer to the ground VDD, meaning the discharging operation is progressing), the signal SN1 is set to a low level synchronous with the voltage detect control signal SX, which is repeatedly set to a low level in a predetermined cycle. When the signal SN1 set to a low level, the stored electricity unit discharge control circuit 305 sets the first stored electricity unit discharge control signals SO1 to a low level. Thus, the period P1 shifts to a period P2.

[0125] When the first stored electricity unit discharge control signals SO1 are set to a low level, the timepiece control circuit 303 in FIG. 3 outputs for example a signal to stop the motor drive unit E. Accordingly, during period P2, discharging of battery unit 48 is stopped, and the stored electricity voltage VTKN or the stored electricity voltage raising and lowering result voltage VSS is gradually brought to a low voltage by the voltage recovery effect. Then when the voltage VTKN or VSS becomes lower than the discharge reference voltage DCHRGV, the signal SN1 is set to a high level synchronous with the voltage detect control signal SX, and the second stored electricity unit discharge control signals SO2 is set to a low level. By this, the period P2 shifts to a period P3.

[0126] It is to be noted that, although not shown in FIG. 3, the operation check function control signal SS and the operation check function mode select result signal SV and the like are supplied to the timepiece control circuit 303. The timepiece control circuit 303 is capable of distinguishing the shifting state between each mode by these control signals.

[0127] When the second stored electricity unit discharge control signals SO2 are set to a high level, the timepiece control circuit 303 in FIG. 3 outputs, as the motor driving signal SF, a drive clock signal to fast-forward the motor unit D. Here, fast-forwarding modes include 32 hertz fast-forwarding, an intermittent drive of 32 hertz drive and stop, 8 hertz fast-forwarding, and the like. During P3, the electric charge of the battery unit 48 is re-released to be a drive current on a scale of smaller than that of the period P1 and larger than that at the normal drive state.

[0128] Then, when the voltage VTKN or VSS again becomes higher than the discharge reference voltage DCHRGV, the signal SN1 is set to a low level at a timing synchronous with the voltage detect control signal SX, and the second stored

electricity unit discharge control signals SO2 are set to a low level. Thus, period P3 shifts to period P4.

[0129] When the second stored electricity unit discharge control signals SO2 are at a low level, the timepiece control circuit 303 stops the motor drive circuit E. Therefore, during period P4, discharging of the battery unit 48 is stopped, and the stored voltage VTKN of the battery unit 48 or the stored raising and lowering result voltage VSS is again gradually brought to the low voltage by the voltage recovery effect. Until the stored voltage becomes stable or the shift to mode 2 is carried out by the external input, the operations performed during periods P3 and P4 are repeated and the discharging is carried out. However, in the example of FIG. 7, after one repeat operation a shift to the mode 2 is conducted.

[0130] Next, the stored electricity unit charging completion judge circuit 306 shown in FIG.5 will be described. The circuit 306 is composed of an AND gate 511, and outputs as the stored electricity unit charge completion control signal SP a logical AND function of the voltage detect result signal SN2 and the operation check function mode select result signal SV2. Here, the signal SN2 is a signal output from the voltage detecting circuit 302 and is set to a high level when the stored electricity voltage VTKN or the stored voltage raising and lowering result signal SD (VSS) becomes lower than the charge reference voltage CHRGV (that is, further from the ground VDD, or reaching the predetermined discharge voltage). The signal SV2 is a signal output from the operation check function mode select circuit 312 and is set to a high level when the mode is 2. Accordingly, the signal SP becomes is set to a high level when the operation check function is at mode 2 and the stored electricity unit 48 is charged until it reaches charge reference voltage CHRGV.

[0131] In mode 2 in the timing chart of FIG. 7, a vibration is given to the timepiece from outside, and electricity is generated in the generator system A. Therefore charging of the battery unit 48 is conducted, and the stored voltage VTKN goes down (period P5). During this time, the timepiece control circuit 303 supplies for example a prefixed pulse signal to the motor drive circuit E, and causes the motor unit D to perform normal hand movement (one-second interval movement).

[0132] Charging continues, and when the stored voltage VTKN or the stored raising and lowering result voltage signal SD (VSS) becomes lower than the charge reference voltage CHRGV, the signal SN2 is set to a high level synchronous with the voltage detect control signal SX. Additionally, the stored electricity unit charge completion control signal SP is set to a high level. Thus, period P5 shifts to period P6.

[0133] When the stored electricity unit charge completion control signal SP is set to a high level and the operation enters into period P6, the timepiece control circuit 303 supplies, for example, the motor driving signal SG to the motor drive circuit E, and controls the hand movement state of the motor unit D to for example two-second interval movement which is different from the normal hand movement (in this case, one-second interval movement). By this change of the hand movement operation, notification of completion of charging is provided. It is to be noted that, in period P6, if the charging voltage increases (that is, discharging is conducted), charging is conducted in the same way as in period P5. Accordingly, in practice, periods P5 and P6 are repeated, and the charging voltage becomes stable.

[0134] Next, the motor drive trouble judge circuit 304 shown in FIG.5 will be described. Circuit 304 comprises dual-input AND gates 512 and 513 (both having one active-high input and active-low input), a triple-input OR gate 514, a dual-input OR gate 515, and a 3-bit counter 516.

[0135] AND gate 512 receives the non-rotation detect measure signal SY at its active-high input terminal, and the high-frequency magnetic field detect result signal SK or the alternating current magnetic field detect result signal SL at its active-low input terminal. Here, the signal SY is a signal generated when non-rotation in the motor unit D is detected. The signals SK and SL are set at high levels when a magnetic field is detected.

[0136] AND gate 512 receives the rotation detect result signal SM as at its active-low input terminal, and receives output Q2 of counter 516 at its active-low input terminal. Here, the signal SM is set to a high level when non-rotation in motor unit D is detected. The output Q2 of counter 516 is set to a high level when the counter number of counter 516 becomes 4 or more.

[0137] OR gate 514 receives the output AND gate 512, the operation check function mode select result signal SV3, and output Q2 of counter 512.

[0138] OR gate 515 receives the output AND gate 513 and the operation check function mode select result signal SV3.

[0139] The operation of the motor drive trouble judge circuit 304 configured as explained above will be described by reference to FIG. 7 as follows.

[0140] In FIG. 7, in mode 2, when the indicator switch is pushed on, operation shifts to mode 3 (period P6 to period P7). In this mode 3, the operation check function mode select result signal SV3 is set to an active level (low level), and the reset state of the counter 516 of the motor drive trouble judge circuit 304 is cancelled.

[0141] In mode 3, quality verification of the operation state under high and low temperatures is carried out. Quality verification is carried out as follows.

[0142] First, the timepiece control circuit 303 in FIG. 3 supplies the motor drive signal SE to the motor drive circuit E, and conducts a normal control of the motor unit D (one-second interval movement, rotation detect, drive by auxiliary pulse under a certain condition, and the like).

[0143] Here, this supply of the motor drive signal SE causes the motor to rotate. And when the rotation is detected, the rotation detect result signal SM is output from the rotation detect circuit 309, and thus the counter 516 is reset.

[0144] On the other hand, if the motor does not rotate when signal SE is supplied, pulse signals including the auxiliary pulse having more power than the normal driving pulse are automatically supplied to the motor drive unit D from the timepiece control circuit 303, and at the same time the timepiece control circuit 303 outputs the non-rotation detect measure signal SY.

[0145] Counter 516 counts the number of times signal SY is generated.

[0146] When the non-rotation detect measure signal SY is applied to counter 516 four times successively while no rotation is detected, output Q2 of counter 516 is set to a high level, and the motor drive trouble judge signal SQ indicating that the motor has a problem is output.

[0147] The timepiece control circuit 303, when the motor drive trouble judge signal SQ is at a high level, supplies to the motor drive circuit E, for example, the motor drive signal SH for causing the motor unit D to implement two-second-interval hand movement which is different from the normal hand movement of one-second-interval hand movement.

[0148] On the other hand, when the motor drive trouble judge signal SQ is set to a high level, the counter 516 no longer receives a reset signal and a clock signal. Therefore, the counter 516 stops counting. The signal SQ maintains a high level until mode 3 is cancelled and the operation check function mode select result signal SV3 is set to a high level.

[0149] Specifically, even after the quality verification operation at high and low temperatures ends, and the temperature becomes normal, as long as mode 3 is maintained, drive signals causing a hand movement different from the normal hand movement supplied to the motor unit D.

[0150] Accordingly, after the quality verification operation, notification of the motor drive trouble that occurred during the quality verification operation continues to be made.

[0151] Next, the motor driving signal SF for discharging the battery unit will be described by reference to FIG. 8.

[0152] FIG. 8 is a block diagram showing the timepiece control circuit 303 shown in FIG. 1, the motor drive circuit E and the motor unit D. The motor drive circuit E comprises switches 701 to 705 and 707, and rotation detect use elements 706 and 708. In the example shown in FIG. 8, switches 701, 703, 705, and 707 are P-channel MOS (metal oxide semiconductor) transistors, and switches 702 and 704 are N-channel MOS transistors.

[0153] Four switches 701 to 704 form a bridge circuit which drives the stator winding of the motor unit D by use of a potential difference between VDD and VSS as source voltage.

[0154] Rotation detect use elements 706 and 708 are elements to place restrictions on current flowing through the motor unit D, and are comprised of resistors and the like.

[0155] Switch 705 and rotation detect use element 706 are connected in series between one terminal of the motor coil of the motor unit D and the power source line VDD. Switch 707 and rotation detect use element 708 are connected in series between the other terminal of the motor coil of the motor unit D and the power source line VDD.

[0156] To cause short-circuit current to flow in the motor drive circuit E (for the purpose of discharging the battery unit 48) using the above configuration, switches 701 and 704 are turned on to cause short-circuit current O1 to flow in accord with the load of the motor unit D. By turning on switches 703 and 702, it is also possible to cause short-circuit current O2 to flow in accord with the load of the motor unit D. And by making one of short-circuit currents O1 or O2 flow constantly, or by making short-circuit currents O1 and O2 flow by turns at a predetermined fast-forwarding cycle, it is possible to control the short-circuit current.

[0157] When required to generate a comparatively small discharge current, it is possible to establish discharge current flow through motor unit D via rotation detect use elements 706 or 708.

[0158] Next, one example of the operation check method of the electronic timepiece explained above will be described by reference to FIG. 9A, 9B, 9C, and 10. FIGs. 9A, 9B, and 9C collectively form a flowchart showing flow of operation check process

of the electronic timepiece. The flowchart shows the check procedure of processes B101, B104, and B105, which comprise the operation check process B100 shown in the FIG. 2. FIG. 10 shows a specification of the operation check process in FIGs. 9A, 9B, and 9C.

[0159] With reference to FIGs. 9A, 9B, and 9C, the timepiece is in the normal operation drive state in step 801, and is shifted to mode 1 by specific operation of the crown in step 802 (i.e. a shift to the mode 1 is commanded, as shown in FIG. 10, by pulling out the crown by two clicks and pushing it back for a predetermined time period). As a result, the mode 1 (battery discharge mode) starts. In mode 1, the drive is discharged by using, for example, a fast-forwarding pulse of 32 hertz (step 803). Due to this discharging, when the absolute value of the stored voltage VTKN falls below a predetermined voltage (i.e. 1.25V in Fig. 10), the drive in the motor unit D is stopped (step 804). In practice, the drive discharging operation in step 803 has two steps: the first being a continuous fast-forwarding discharge; and the second being a discharge by repeated stopping and starting of the fast-forwarding discharge at two second intervals. If the voltage of the battery 48 drifts upward, steps 803 and 804 are repeated until the voltage no longer drifts. It will take for example several tens of hours discharging until the discharged state becomes stable at step 804. It is to be noted that the time period necessary to discharge differs depending on the type of battery, as shown in FIG. 10, but several tens of hours is adequate. Therefore after discharging for a predetermined time period of several tens of hours, by checking the hand movement state, it is possible to determine whether or not the discharging operation is completed. In this example, as shown in FIG. 10, when repeated fast-forwarding and stopping is occurring, it is possible to determine that the discharging operation is completed, and when continuously fast-forwarding is occurring, it is possible to determine that the discharging operation is not completed.

[0160] After completion of the discharge, when the operator handles the indicator switch once (step 805), the mode shifts to the mode 2 (charging mode). In the mode 2, the motor unit D is driven (step 806) using the normal hand movement method (one-second interval movement). During this period, by applying vibration, electricity is generated in the generator system A, and the battery 48 is charged (step 807). In this step, charging for from several tens of minutes to several hours is carried out, and when the absolute value of the stored voltage VTKN becomes equal to or larger than a predetermined voltage (in FIG. 10, 1.33 V), the normal hand movement state shifts to the two-second interval movement state (step 808). Therefore, after the predetermined time period, if the normal hand movement state is maintained, it is possible to determine that the charging function has a problem

(step 809). In this step, before the operation check of the mode 3, time adjusting is carried out (step 810). Time adjusting is accomplished by, for example, pulling out the crown by two clicks and turning the crown. In the present embodiment, when the mode is at the mode 1 or 3, if the crown is operated, the operation check function is released. But, when the mode is at the mode 2, if the crown is operated to adjust time, the mode does not shift to another mode.

[0161] Next, when the operator handles the indicator switch once (step 811), the mode shifts to the mode 3 (operation mode). In the mode 3, the motor unit D is driven (step 812) using the normal hand movement. Then in the electronic timepiece, self-verification of the drive malfunction during operation is carried out by use of the auxiliary pulse (step 813). In this step, when the successive pulse drive does not require the use of more than a predetermined number of auxiliary pulses during operation, the electronic timepiece determines itself to be normal and leaves the hand movement state in the one-second-interval movement (step 814). Thus, the operator can determine that the electronic timepiece is in good quality. On the other hand, when the successive pulse drive requires the use of more than a predetermined number of auxiliary pulses during operation, the electronic timepiece determines itself to be bad and places the hand movement state in the two-second-interval movement (step 815). Thus, the operator can determine that the electronic timepiece is bad.

[0162] Next, when the operator performs a two-click crown pull-out (step 816), mode 3 is cancelled, and normal operation state is restarted (step 817).

[0163] It is to be noted that in step 814, when indicator handling is executed twice (step 818), the movement is placed in one-second-interval movement operation (step 819). In this case, even if the charging is carried out next (step 820), the one-second hand movement continues (step 821) irrespective of the charging state. And in step 804, when indicator handling is carried out three or more times (step 822), the indicator for indicating the charging state is put into operation (step 823). Also, in step 810, it is conceivable that indicator handling is carried out twice or more times (step 824), or the operation state becomes that of step 821 or 823. In these cases, when the crown is next handled (step 825), the operation returns to the normal drive state of step 801. By these check procedures, even if the operator makes a mistake in inputting an operation with the indicator, it is impossible to identify a poor quality product as a good quality one. For example, in step 804, normally the indicator is handed once to shift to mode 2. However, it can happen that the operator handles the indicator twice by mistake. In this case, one-second interval movement takes place, and the operator cannot tell whether the movement is that

of step 806 or step 819. However, since the operator thinks that the indicator handling was performed once, the operator thinks the mode is mode 2 and conducts charging. In this case, charging in step 820 is executed followed by one-second interval movement in step 821. Since the operator mistakes step 809 for step 821, and the operator determines that the electronic timepiece is bad (in reality, since at the mode 1 the indicator is handled twice, the mode was shifted to mode 3, and not to mode 2). As explained here, there are circumstances when the check flow shifts to step 825 due to a good quality product being misjudged as a poor quality one. But it is impossible to misjudge a poor quality product as a good quality one. Furthermore, a good timepiece that is misjudged as bad will undoubtedly re-judged as good when the check routine is repeated starting from step 825. Additionally at step 804, if the indicator is handled three times or more, as in the above case when the operator handled the indicator two times by mistake, the third handling of the indicator signals, for example, an operation for starting the displaying of the charging amount indicator. Since in this check operation flow there is no process step for starting the displaying of the charging amount indicator, the operator can tell immediately that the mode is not at mode 2 due to the difference of the display. Therefore, the operator recognizes that the indicator was mishandled, and proceeds to step 825 and re-executes the check operation flow. Furthermore, if the process flow is at the step 810 and the indicator is handled two times or more, the second handling of the indicator would typically signal an operation for starting the displaying of the charging amount indicator. However in this check flow, there is no process to start the displaying of the charging amount indicator and the operator can therefore immediately recognize that the mode is not at the mode 3 due to the difference of the display. Therefore, the operator recognizes that the indicator was mishandled, and proceeds to step 825 and re-executes the check flow.

[0164] As described above, in the present embodiment, in mode 1, by applying an external input operation to the electronic timepiece, discharging implemented by fast-forwarding drive in the motor unit D, or by short-circuiting of the motor drive circuit E, or the like. Accordingly, no special provision for discharging the battery is necessary. Additionally, when the operational mode shifts to mode 1, the shift takes place from the normal hand movement state to the different state of fast-forwarding hand movement or hand movement stoppage. By observing the difference in hand movement, the mode shift is easily verified.

[0165] In the above embodiment, the external input operation is performed by use of the crown and the indicator switch. But the present invention is not limited to this. It is possible to use other mechanical input methods. It is also possible to provide an infrared remote control receiver unit in the electronic timepiece, and use

infrared signaling as the input method. Electricity, a radio wave, light, sound, an electromagnetic wave, heat, and the like are also suitable as input methods.

[0166] In the above embodiment, discharging in mode 1 is continued until the battery voltage reaches the prescribed voltage. When the battery voltage reaches the prescribed voltage, the discharging and the hand movement stop. Accordingly, by the hand movement (fast-forwarding or stoppage), it is possible to determine whether discharging is ongoing or discharging is completed. Also, when the battery voltage drifts beyond the predetermined voltage due to the battery voltage recovery effect, discharging is resumed and is repeatedly executed until the voltage is returned to the predetermined voltage. The battery voltage after discharging is thereby made stable.

[0167] Also, in the above embodiment, two setting values of the discharging current amount are provided, heaving load discharging in first stage and light load discharging in the second stage. Therefore it is possible to control the battery voltage to the predetermined voltage in a shorter time period. More than two setting values of the discharging current amount can be provided.

[0168] Furthermore, in mode 2, it is possible to shift to the charging mode by operation of an external input on the electronic timepiece, and after mode shifting, the operation is executed in the normal hand operation state. During a charging operation, when the voltage reaches the predetermined (i.e. completion) voltage level, a notification that charging to the predetermined voltage level or higher, has been achieved is made by changing the hand movement state. The changing of the hand movement at this time is not limited to the above form, and can be arranged in any other form as long as it is possible to tell the difference of before and after charging completion.

[0169] In mode 2, during the charging of the battery, the observed voltage rise can be false (i.e. transient). That is, when the observed voltage first reaches the completion voltage level, the battery voltage can gradually fall to a real charged voltage after completion of the charging (i.e. the charging operation is stopped). But in the present embodiment, in a situation where the charging voltage reaches the completion voltage level and the charging voltage then falls below the completion voltage level, the hand movement again returns to the normal hand movement. Accordingly, after completion of the charging, by leaving the timepiece until the false battery voltage becomes the real voltage and then confirming the hand movement, it is possible to prevent a misinterpretations due to a false voltage high.

[0170] In the above embodiment, if it is successively detected that the motor does not rotate when a normal motor drive pulse is supplied, a drive pulse having

greater effective electric power than the normal driving pulse is applied. In mode 3, if the drive pulse is successively output a predetermined number of times (or more), then it is determined that a problem where the motor is not driven by application of a normal drive pulse has occurred. Thus the hand movement is changed, and notification of the motor problem is made.

[0171] In mode 3, by operation of external input on the electronic timepiece, the mode is shifted to a poor quality detection mode, and the electronic timepiece is operated in a predetermined hand movement. Therefore, by changing the hand movement state of before and after this shift, it is made possible to easily confirm the mode shift.

[0172] Further, once the trouble is detected, the hand movement at the trouble detection is continued, therefore it is possible to easily confirm the result of trouble detection.

[0173] Also, in mode 3, because it is possible to perceive the motor drive trouble by the hand movement, it is made possible to identify the trouble.

[0174] Also, it becomes possible to detect that the motor quality is somewhat lower than the satisfying quality but is not bad enough to cause stoppage (time keeping continuation trouble) or delay, both being difficult to detect hitherto. Therefore, quality improvement is expected. Namely, if the motor quality is a bit poor and the detection of the non-rotation is frequently made, the motor will be driven by the auxiliary pulse having bigger effective electric power than the normal driving pulse. Therefore, time delay does not occur. However, because of the frequent output of the auxiliary pulse, power consumption rises and remaining operation time is shortened. This kind of quality problem could previously not be properly discovered until now due to no time delay being observed, but mode 3 makes the detection certain.

[0175] In the above embodiment, no special check equipment is necessary to conduct the operation check function. Therefore the present invention is easily applicable to cases of, for example, advancing to foreign market, or assembling at several regions or places. And even after the shipment for example at the store or at the sales department or the like, it is possible to verify the timepiece operation easily.

[0176] Methods corresponding to the modes 1 to 3 mentioned above can be individually used. For example the following utilizations are possible.

[0177] Manufacturing and using battery voltage adjusting devices corresponding to the mode 1.

[0178] Manufacturing and using check devices or full-charge notification devices corresponding to the mode 2.

[0179] Manufacturing check devices corresponding to both of the mode 1 and 2, and using them for checking of generation unit of analog, digital, or analog-digital combination electric timepieces.

[0180] Configuring operation check system corresponding to all of the mode 1, 2, and 3, and using them for operation checking of analog, digital, or analog-digital combination electric timepieces.

[0181] Combining the modes 1 and 3, and using for various devices.

[0182] Combining the modes 2 and 3, and using for various devices.

[0183] Also, in the above embodiment, the operation result of each mode (states of discharging or charging or operation check result) is revealed by changing the displaying state (hand movement state) on the time displaying section. But this is not limited to the above form, and other method can be used to reveal the operation result of each mode. For example, if the timepiece has a digital displaying section, it is possible to change the displaying state from the non-displaying state to other state, and thus to enable the notification of the operation result. And if the timepiece has a sound wave generating element or display light, by shifting of sound generation and sound non-generation, by turning the light on/off, by shifting of the sound generation state (frequency, generation cycle, or the like), or by changing the flashing period of the display light, it is possible to notify the charging state or the check result.

[0184] The embodiment of the present invention is not limited to the above embodiment. For example, the charging device for the battery is not limited to the provision as an internal unit, but can be provided as a removable unit or as an external unit.

[0185] In the above embodiment, a timepiece is exemplified with a generator of an oscillating weight or the like is driven by kinetic energy and the electricity is generated by the rotation from the oscillation weight and then by the electricity the timepiece works. But the present invention is not limited to this. Other generation methods are also possible for an electric timepiece such as using light energy from a solar panel, such as thermal energy with a Peltier element, and such as using strain energy from a piezo element. Other method is also possible for an electric timepiece by providing electricity generated by an electromagnetic induction from outside of the timepiece, and then a stepping motor is moved by the electricity. In addition to timepieces, the present invention is applicable to stopwatches and other time

keeping apparatus. And the raising and lowering circuit 49 can be omitted. In that case, the circuit driven by the output voltage VSS of the circuit 49 is driven by the output voltage VTKN of the battery 48.